



**CATALOGUE**

**IAN LED CEILING LIGHTING COLLECTION**

**亿恩LED射灯/筒灯精选**

# Company Profile

As Lighting plays a wonderful & important role in our life.

We became one of the excellent **ONE STATION** lighting Manufacturer.  
as well as providing OEM & ODM service and with the best lighting solutions.

Lighting not only giving brightness but also decorated where every you want.  
Special in LED lighting, as it is green to the world.

With +17 years Experienced in **researching , engineering , developing ,  
and producing** of indoor and outdoor lighting items.

For Indoor lighting such as Fancy decorative lights, Ceiling lights, Track light,  
Spotlights, Down lights, Aluminium profile lights, Linear strips.

As well as outdoor lighting such as Floor lamp, Street light, Outdoor spots,  
Wall washers, Outdoor wall lights , Solar lightings and so on.

as we had strong mind for using good quality raw material and as well a good service. with the rich experience we also can guide you very well for maintenance.  
we can assure you 2-5 years gurantee according to your inquiry..

Since year of 2007, IAN LED lighting factory concentrate on producing good quality lighting products and dealing with +150 countries.

we always strive for excellence, aims to supply the best quality and reasonable price products and the best services, for winning customers' hearts and trusts.



**Looking forward to cooperate with you!**

# CONTENTS



G8  
P1



X6  
P3



GX6  
P5



IC5039  
P7



G2403S  
P9



G2403B  
P11



G2403C  
P13



G2405A  
P15



G2405B  
P17



G2405C  
P19



G2406A  
P21



G2406B  
P23



G2406C  
P25



IC1811A  
P27



IC1811B  
P29



IC1811C  
P31



IC1811D  
P33



IC1818  
P35



IC1818  
P37



IC1818  
P39



GC2212A  
P41



GC2212A  
P43



GC2212A  
P45



GC2212A  
P47



GC2212B  
P49



GC2212B  
P51



GC2212B  
P53



GC2212B  
P55



GDH55R  
P57



GDH75R  
P59



GDH95R  
P61



GDH120R  
P63



GDH145R  
P65



GDH55R SLIM  
P67



GDH75R SLIM  
P69



GDH95R SLIM  
P71



GDH120R SLIM  
P73



GDH145R SLIM  
P75



GDH55F  
P77



GDH75F  
P79



GDH95F  
P81



GDH120F  
P83



GDH145F  
P85



GDH55F SLIM  
P87



GDH75F SLIM  
P89



GDH95F SLIM  
P91



GDH120F SLIM  
P93



GDH145F SLIM  
P95



GDHO75A  
P97



GDHO75A SLIM  
P99



GDHO75B  
P101



GDHO75B SLIM  
P103



GDHR75A  
P105



GDHR75A SLIM  
P107



GDHR75B  
P109



GDHR75B SLIM  
P111



GDHP75A  
P113



GDHP75A SLIM  
P115



GDHP75B  
P117



GDHP75B SLIM  
P119



GDH55F-2  
P121



GDH75F-2  
P123



GDH95F-2  
P125



GDH55F-2 SLIM  
P127



GDH75F-2 SLIM  
P129



GDH95F-2 SLIM  
**P131**



GDH55F-3  
**P133**



GDH75F-3  
**P135**



GDH55F-3 SLIM  
**P137**



GDH75F-3 SLIM  
**P139**



GHR55F  
**P201**



GHR75F  
**P203**



GHR95F  
**P205**



GHR55F SLIM  
**P207**



GHR75F SLIM  
**P209**



GDH55F-4  
**P141**



GDH75F-4  
**P143**



GDH55F-4 SLIM  
**P145**



GDH75F-4 SLIM  
**P147**



GJK35  
**P149**



GHR95F SLIM  
**P211**



GHR55F-2  
**P213**



GHR75F-2  
**P215**



GHR95F-2  
**P217**



GHR55F-2 SLIM  
**P219**



GJK45  
**P151**



GJK55  
**P153**



GJK55 SLIM  
**P155**



GJK55F  
**P157**



GDH55F SLIM  
**P159**



GHR75F-2 SLIM  
**P221**



GHR95F-2 SLIM  
**P223**



GHR75OA  
**P225**



GHR75OB  
**P227**



GHR75OA SLIM  
**P229**



GJK55F-2  
**P161**



GJK55F-2 SLIM  
**P163**



GJK75  
**P165**



GJK95  
**P167**



GJK75 SLIM  
**P169**



GHR75OB SLIM  
**P231**



GHR75RA  
**P233**



GHR75RB  
**P235**



GHR75RA SLIM  
**P237**



GHR75RB SLIM  
**P239**



GJK95 SLIM  
**P171**



GJK75F  
**P173**



GJK95F  
**P175**



GJK75F SLIM  
**P177**



GJK95F SLIM  
**P179**



GLD55  
**P241**



GLD75  
**P243**



GLD95  
**P245**



GJS55R  
**P247**



GJS75R  
**P249**



GJK75F-2  
**P181**



GJK95F-2  
**P183**



GJK75F-2 SLIM  
**P185**



GJK95F-2 SLIM  
**P187**



GHR55  
**P189**



GJS95R  
**P251**



GJS55F  
**P253**



GJS75F  
**P255**



GJS95F  
**P257**



GJS55F-2  
**P259**



GHR75  
**P191**



GHR95  
**P193**



GHR55 SLIM  
**P195**



GHR75 SLIM  
**P197**



GHR95 SLIM  
**P199**



GJS75F-2  
**P261**



GJS95F-2  
**P263**



GR323  
**P265**



GR324  
**P267**



GR325  
**P269**





GFS1  
**P411**



GFS2  
**P413**



GFS3  
**P415**



GFS4  
**P417**



GFS5  
**P419**



GFS6  
**P421**



GCF-1H  
**P423**



GCF-2H  
**P425**



GCF-3H  
**P427**



GCF-4H  
**P429**




GCF-5H  
**P431**




GCF-6H  
**P433**



MORE INFORMATION PLEASE VISIT :  
**[WWW.IANLED.COM](http://WWW.IANLED.COM)**

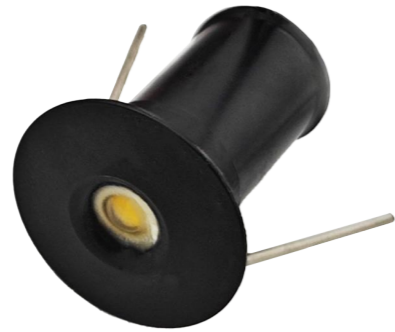

CUT SIZE:15mm



20mm

H24mm

BEAM ANGLE



24°

BODY COLOR



SILVER



WHITE



BLACK

G8

LIGHT SOURCE 1W/3W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 24°

RA >90

LUMENS 80lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:33mm



H20mm

40mm

BEAM ANGLE



60°

BODY COLOR



SILVER



WHITE



BLACK

**X6**

LIGHT SOURCE 1W/3W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 60°

RA >90

LUMENS 80lm/240lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF




0-10V



PHASE CUT







H21mm

CUT SIZE:35mm

42mm

BEAM ANGLE



60°

BODY COLOR



SILVER



WHITE



BLACK

**GX6**

LIGHT SOURCE 1W/3W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 60°

RA >90

LUMENS 80lm/240lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:80mm



H55mm

95mm

BEAM ANGLE



45°

BODY COLOR



WHITE



BLACK

**IC5039**

LIGHT SOURCE 5W/7W/9W/12W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC85-265V

ANGLE 45°

RA >90

LUMENS 400lm/560lm/720lm/960lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT






CUT SIZE:55mm

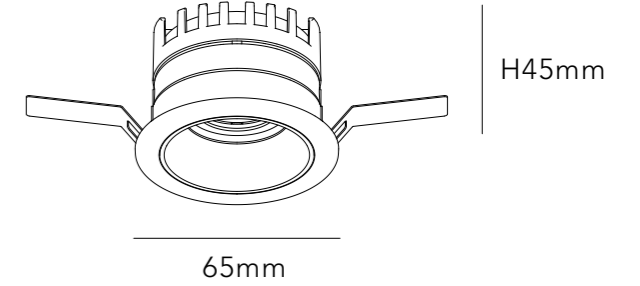

BEAM ANGLE



BODY COLOR

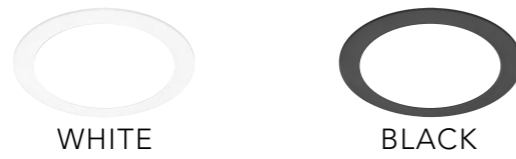

REFLECTOR COLOR



**G2403S**

LIGHT SOURCE 7W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC85-265V

ANGLE 15°/24°/38°

RA >90

LUMENS 560lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF




0-10V




PHASE CUT



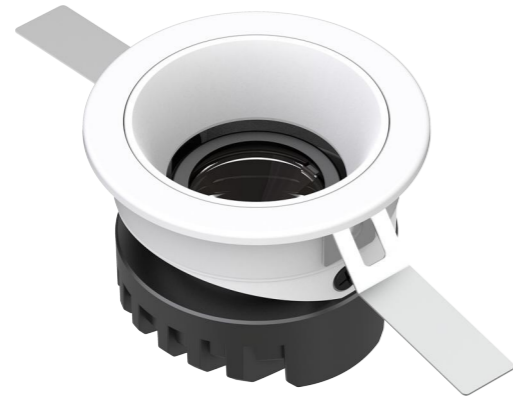


CUT SIZE:75mm

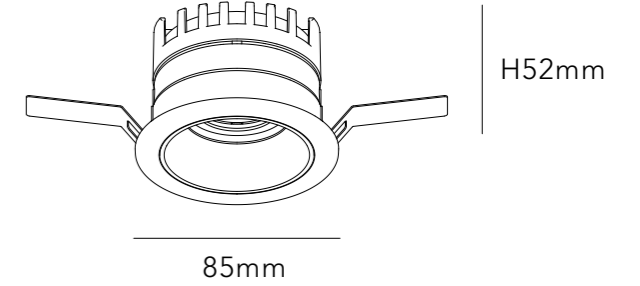

BEAM ANGLE



BODY COLOR

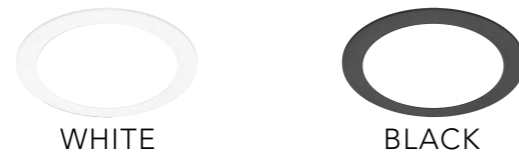

REFLECTOR COLOR



**G2403B**

LIGHT SOURCE 9W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC85-265V

ANGLE 15°/24°/38°

RA >90

LUMENS 720lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:95mm

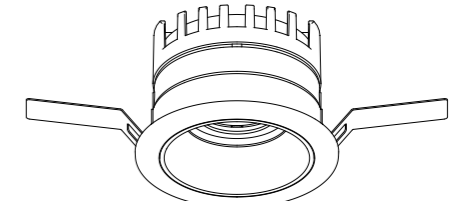

H66mm

105mm

BEAM ANGLE



15°

24°

38°

BODY COLOR



WHITE



BLACK

REFLECTOR COLOR



WHITE



BLACK



CHROME

**G2403C**

LIGHT SOURCE 18W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC85-265V

ANGLE 15°/24°/38°

RA >90

LUMENS 1440lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:65mm

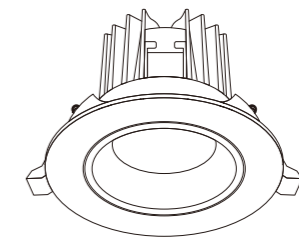

H55mm

79mm

BEAM ANGLE



15°

24°

38°

BODY COLOR




WHITE



BLACK

REFLECTOR COLOR



WHITE



BLACK

**G2405A**

LIGHT SOURCE 7W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE 220-240V

ANGLE 15°/24°/38°

RA >90

LUMENS 560lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:80mm

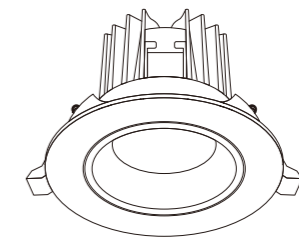

H64mm

94mm

## G2405B

LIGHT SOURCE 12W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE 220-240V

ANGLE 15°/24°/38°

RA >90

LUMENS 960lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V



PHASE CUT



### BEAM ANGLE



15°



24°



38°

### BODY COLOR




WHITE



BLACK

### REFLECTOR COLOR




WHITE



BLACK



CUT SIZE:95mm

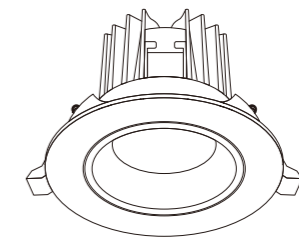

H85mm

109mm

## G2405C

LIGHT SOURCE 20W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE 220-240V

ANGLE 15°/24°/38°

RA >90

LUMENS 1600lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V



PHASE CUT



### BEAM ANGLE



15°



24°



38°

### BODY COLOR



WHITE



BLACK

### REFLECTOR COLOR



WHITE




BLACK





CUT SIZE:55mm

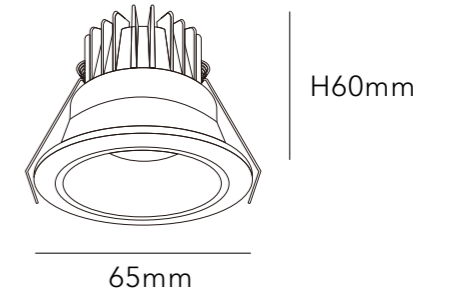

BEAM ANGLE



BODY COLOR



REFLECTOR COLOR



**G2406A**

LIGHT SOURCE 7W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE 220-240V

ANGLE 15°/24°/38°

RA >90

LUMENS 560lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:75mm

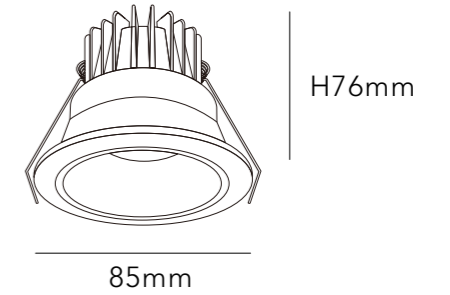

BEAM ANGLE



BODY COLOR



REFLECTOR COLOR



**G2406B**

LIGHT SOURCE 12W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE 220-240V

ANGLE 15°/24°/38°

RA >90

LUMENS 960lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:95mm



H108mm

105mm

BEAM ANGLE



15°

24°

38°

BODY COLOR




WHITE



BLACK

REFLECTOR COLOR



WHITE



BLACK



CHROME

**G2406C**

LIGHT SOURCE 20W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE 220-240V

ANGLE 15°/24°/38°

RA >90

LUMENS 1600lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:60mm



H90mm

65mm

BEAM ANGLE



BODY COLOR

**IC1811A**

LIGHT SOURCE 7W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC85-265V

ANGLE 15°/24°/36°

RA >90

LUMENS 560lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF




0-10V

PHASE CUT





CUT SIZE:75mm



H95mm

80mm

BEAM ANGLE



BODY COLOR

WHITE

BLACK

**IC1811B**

LIGHT SOURCE 10W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC85-265V

ANGLE 15°/24°/36°

RA >90

LUMENS 800lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF




0-10V

PHASE CUT





CUT SIZE:88mm



H130mm

95mm

BEAM ANGLE



BODY COLOR

## IC1811C

LIGHT SOURCE 18W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC85-265V

ANGLE 15°/24°/36°

RA >90

LUMENS 1440lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF




0-10V

PHASE CUT





CUT SIZE:107mm



115mm

H150mm

BEAM ANGLE



BODY COLOR



## IC1811D

LIGHT SOURCE 20W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC85-265V

ANGLE 15°/24°/36°

RA >90

LUMENS 1600lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:35mm



H58mm

40mm

BEAM ANGLE



36°

BODY COLOR



WHITE



BLACK


REFLECTOR COLOR



WHITE



BLACK



GREY

IC1818

LIGHT SOURCE 5W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC85-265V

ANGLE 36°

RA >90

LUMENS 400lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT







CUT SIZE:55mm



H83mm

60mm

## IC1818

LIGHT SOURCE 9W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC85-265V

ANGLE 18°/36°/45°

RA >90

LUMENS 720lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V



PHASE CUT



### BEAM ANGLE



18°



36°



45°

### BODY COLOR



WHITE



BLACK


### REFLECTOR COLOR



WHITE




BLACK



GREY



CUT SIZE:68mm



H100mm

74mm

BEAM ANGLE



BODY COLOR



REFLECTOR COLOR



IC1818

LIGHT SOURCE 15W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC85-265V

ANGLE 18°/36°/45°

RA >90

LUMENS 1200lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:75mm



H72mm

90mm

**BEAM ANGLE**



**BODY COLOR**

WHITE

BLACK

**GC2212A**

LIGHT SOURCE 12W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°

RA >90

LUMENS 960lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF




0-10V

PHASE CUT





CUT SIZE:95mm



H92mm

110mm

BEAM ANGLE



WHITE

BLACK

BODY COLOR

## GC2212A

LIGHT SOURCE 20W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°

RA >90

LUMENS 1600lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:120mm



H112mm

140mm

**BEAM ANGLE**



**BODY COLOR**



WHITE



BLACK

**GC2212A**

LIGHT SOURCE 30W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°

RA >90

LUMENS 2400lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:145mm



H114mm

160mm

BEAM ANGLE



BODY COLOR



WHITE



BLACK

**GC2212A**

LIGHT SOURCE 40W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°

RA >90

LUMENS 3200lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:75mm



H80mm

90mm

## GC2212B

LIGHT SOURCE 12W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°

RA >90

LUMENS 960lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V



PHASE CUT



### BEAM ANGLE



### BODY COLOR




### REFLECTOR COLOR





CUT SIZE:95mm



H110mm

110mm

BEAM ANGLE



BODY COLOR



WHITE



BLACK

REFLECTOR COLOR



WHITE



BLACK



CHROME

**GC2212B**

LIGHT SOURCE 20W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°

RA >90

LUMENS 1600lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT







CUT SIZE:120mm



H132mm

140mm

BEAM ANGLE



WHITE

BLACK

REFLECTOR COLOR



WHITE

BLACK

CHROME

**GC2212B**

LIGHT SOURCE 30W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°

RA >90

LUMENS 2400lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:145mm



H132mm

160mm

BEAM ANGLE



BODY COLOR

REFLECTOR COLOR



**GC2212B**

LIGHT SOURCE 40W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°

RA >90

LUMENS 3200lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF




0-10V

PHASE CUT





CUT SIZE:55mm

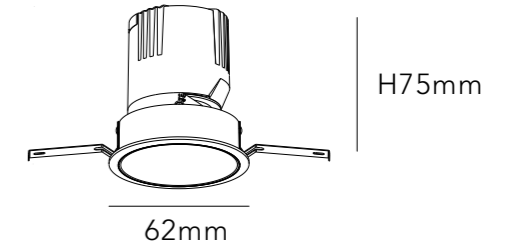

BEAM ANGLE



BODY COLOR



WHITE

BLACK

REFLECTOR COLOR



WHITE

BLACK

CHROME

**GDH55R**

LIGHT SOURCE 7W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 560lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:75mm

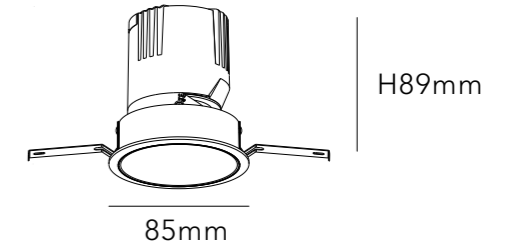

BEAM ANGLE



BODY COLOR



WHITE

BLACK

REFLECTOR COLOR



WHITE

BLACK

CHROME

**GDH75R**

LIGHT SOURCE 12W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 960lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:95mm



H115mm

104mm

## GDH95R

LIGHT SOURCE 20W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 1600lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V



PHASE CUT



### BEAM ANGLE



15°



24°



36°



55°

### BODY COLOR



WHITE



BLACK

### REFLECTOR COLOR



WHITE




BLACK



CHROME



CUT SIZE:120mm



H149mm

140mm

## GDH120R

LIGHT SOURCE 30W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 2400lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V



PHASE CUT



**BEAM ANGLE**



15°



24°



36°



55°

**BODY COLOR**



WHITE



BLACK

**REFLECTOR COLOR**



WHITE




BLACK



CHROME



CUT SIZE:145mm



H179mm

168mm

## GDH145R

LIGHT SOURCE 50W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 4000lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V



PHASE CUT



**BEAM ANGLE**



15°



24°



36°



55°

**BODY COLOR**



WHITE



BLACK

**REFLECTOR COLOR**



WHITE




BLACK



CHROME



CUT SIZE:55mm



H55mm

77mm

## GDH55R SLIM

LIGHT SOURCE 7W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 560lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V



PHASE CUT



**BEAM ANGLE**



15°



24°



36°



55°

**BODY COLOR**



WHITE



BLACK

**REFLECTOR COLOR**



WHITE



BLACK




CHROME





CUT SIZE:75mm



H89mm

100mm

## GDH75R SLIM

LIGHT SOURCE 12W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 960lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V

PHASE CUT



**BEAM ANGLE**



**BODY COLOR**



WHITE



BLACK

**REFLECTOR COLOR**



WHITE




BLACK



CHROME



CUT SIZE:95mm




120mm  
H115mm

## GDH95R SLIM

**BEAM ANGLE**



**BODY COLOR**



WHITE



BLACK

**REFLECTOR COLOR**



WHITE



BLACK



CHROME

LIGHT SOURCE 20W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 1600lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:120mm



H149mm

119mm

## GDH120R SLIM

**BEAM ANGLE**



**BODY COLOR**



WHITE



BLACK

**REFLECTOR COLOR**



WHITE



BLACK



CHROME

LIGHT SOURCE 30W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 2400lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:145mm



H179mm

140mm

## GDH145R SLIM

LIGHT SOURCE 50W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 4000lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V



PHASE CUT



**BEAM ANGLE**



**BODY COLOR**



WHITE



BLACK

**REFLECTOR COLOR**



WHITE




BLACK



CHROME



CUT SIZE:55\*55mm

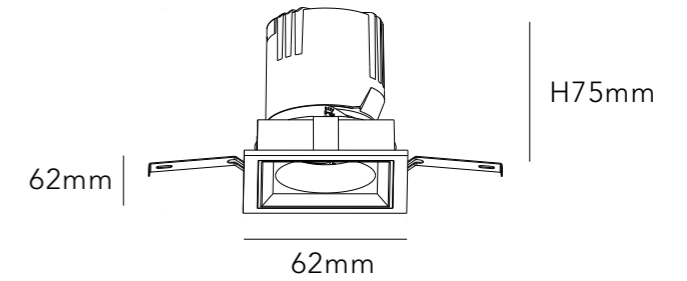

BEAM ANGLE



BODY COLOR



WHITE



BLACK

REFLECTOR COLOR



WHITE



BLACK



CHROME

**GDH55F**

LIGHT SOURCE 7W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 560lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:75\*75mm

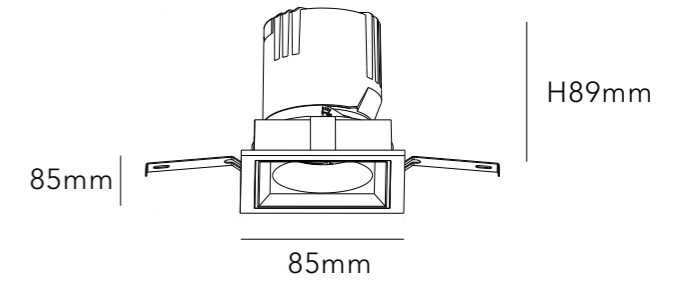

BEAM ANGLE



BODY COLOR



WHITE



BLACK

REFLECTOR COLOR



WHITE



BLACK



CHROME

**GDH75F**

LIGHT SOURCE 12W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 960lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:95\*95mm

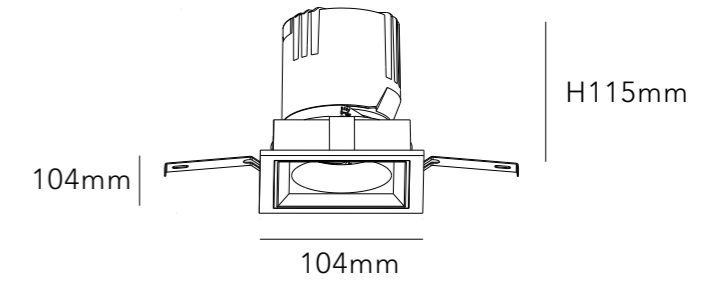

BEAM ANGLE



BODY COLOR



WHITE

BLACK

REFLECTOR COLOR



WHITE

BLACK

CHROME

## GDH95F

LIGHT SOURCE 20W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 1600lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:120\*120mm

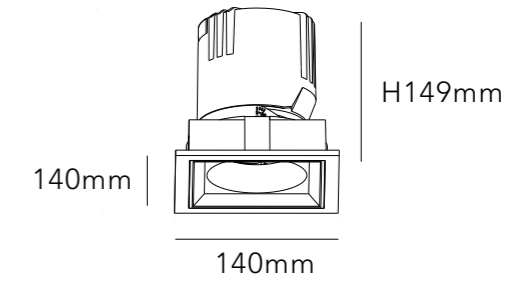

BEAM ANGLE



BODY COLOR



REFLECTOR COLOR



## GDH120F

LIGHT SOURCE 30W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 2400lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT







CUT SIZE:145\*145mm

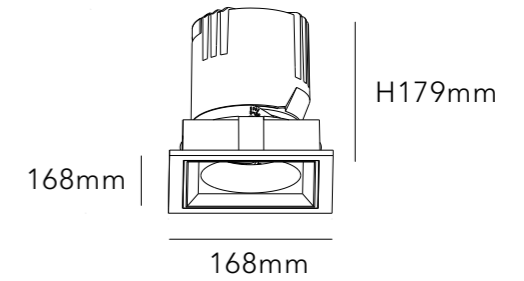

BEAM ANGLE



BODY COLOR



REFLECTOR COLOR



## GDH145F

LIGHT SOURCE 50W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 4000lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:55\*55mm

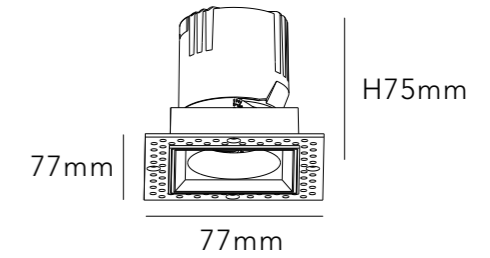

BEAM ANGLE



BODY COLOR



WHITE



BLACK

REFLECTOR COLOR



WHITE



BLACK



CHROME

**GDH55F SLIM**

LIGHT SOURCE 7W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 350lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:75\*75mm

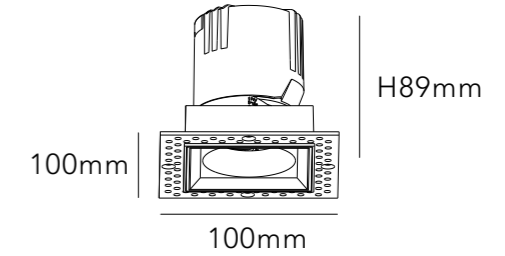

BEAM ANGLE



BODY COLOR



WHITE



BLACK

REFLECTOR COLOR



WHITE



BLACK



CHROME

## GDH75F SLIM

LIGHT SOURCE 12W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 960lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:95\*95mm

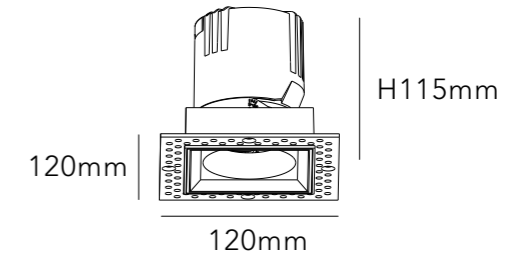

BEAM ANGLE



BODY COLOR



WHITE

BLACK

REFLECTOR COLOR



WHITE

BLACK

CHROME

## GDH95F SLIM

LIGHT SOURCE 20W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 1600lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:120\*120mm

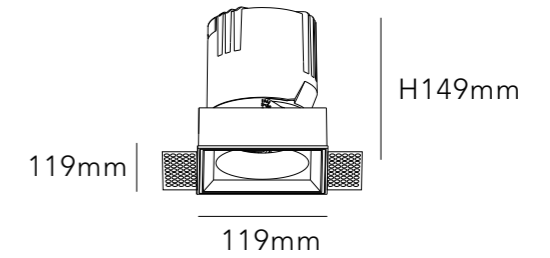

BEAM ANGLE



BODY COLOR



REFLECTOR COLOR



## GDH120F SLIM

LIGHT SOURCE 30W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 2400lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:145\*145mm

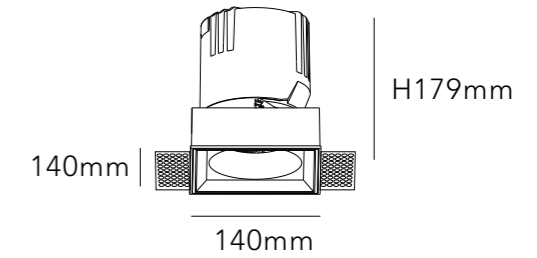

BEAM ANGLE



BODY COLOR



REFLECTOR COLOR



## GDH145F SLIM

LIGHT SOURCE 50W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 4000lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:75mm

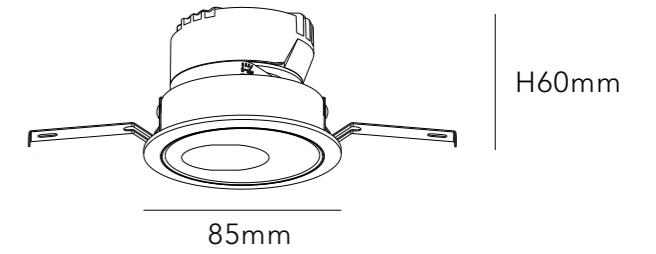

BEAM ANGLE



BODY COLOR



WHITE



BLACK

**GDH075A**

LIGHT SOURCE 7W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 560lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:75mm

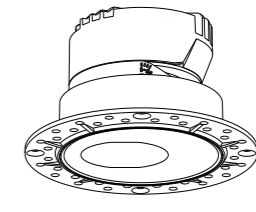

H60mm

H100mm

BEAM ANGLE




15°

24°

36°

55°

BODY COLOR



WHITE



BLACK

**GDHO75A SLIM**

LIGHT SOURCE 7W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 560lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT







CUT SIZE:75mm

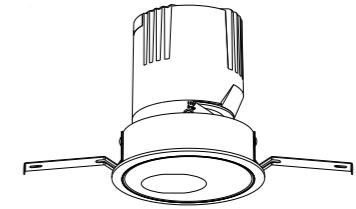

85mm

H89mm

BEAM ANGLE



BODY COLOR



WHITE



BLACK

**GDHO75B**

LIGHT SOURCE 12W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 960lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:75mm




H89mm

100mm

BEAM ANGLE



BODY COLOR



WHITE



BLACK

## GDHO75B SLIM

LIGHT SOURCE 12W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 960lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:75mm

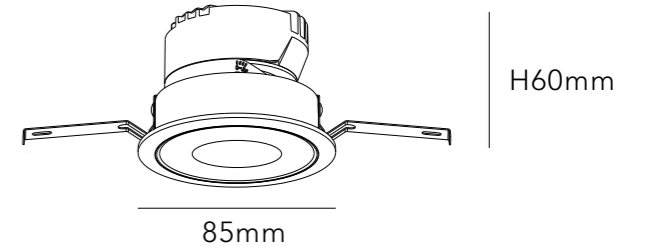

BEAM ANGLE



BODY COLOR



WHITE



BLACK

## GDHR75A

LIGHT SOURCE 7W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 560lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:75mm

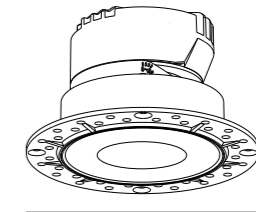


H60mm

100mm

BEAM ANGLE



BODY COLOR



WHITE



BLACK

## GDHR75A SLIM

LIGHT SOURCE 7W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 560lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:75mm

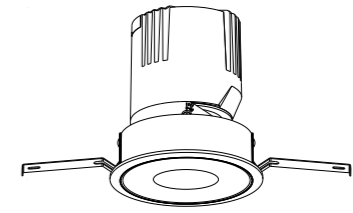

85mm

H89mm

BEAM ANGLE



BODY COLOR



WHITE



BLACK

**GDHR75B**

LIGHT SOURCE 12W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 960lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:75mm




H89mm

100mm

BEAM ANGLE



BODY COLOR



WHITE



BLACK

## GDHR75B SLIM

LIGHT SOURCE 12W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 960lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:75mm

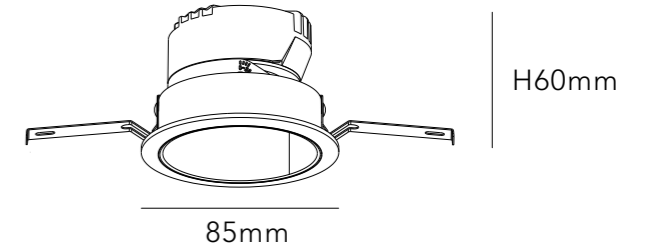

BEAM ANGLE



BODY COLOR



WHITE

BLACK

REFLECTOR COLOR



WHITE

BLACK

CHROME

## GDHP75A

LIGHT SOURCE 7W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 560lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF




0-10V




PHASE CUT



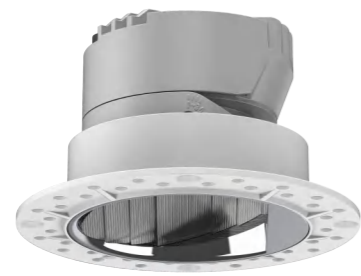

CUT SIZE:75mm

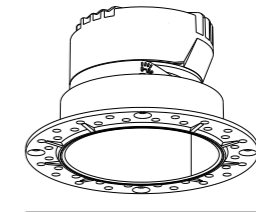

H60mm

100mm

BEAM ANGLE



BODY COLOR



WHITE



BLACK


REFLECTOR COLOR



WHITE



BLACK



CHROME

## GDHP75A SLIM

LIGHT SOURCE 7W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 560lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT







CUT SIZE:75mm

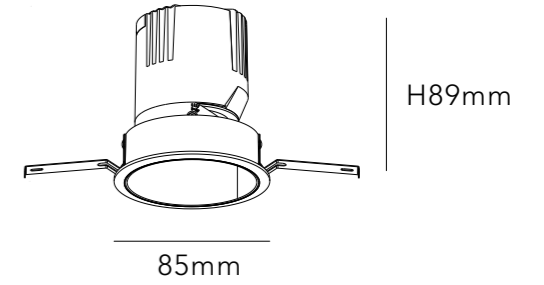

BEAM ANGLE



BODY COLOR



REFLECTOR COLOR



**GDHP75B**

LIGHT SOURCE 12W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 960lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:75mm



H89mm


100mm

## GDHP75B SLIM

**BEAM ANGLE**



**BODY COLOR**



WHITE



BLACK


**REFLECTOR COLOR**



WHITE



BLACK



CHROME

LIGHT SOURCE 12W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 960lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF




0-10V



PHASE CUT



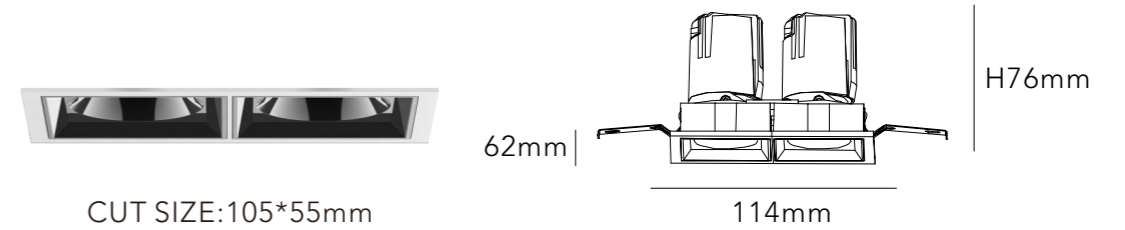

CUT SIZE:105\*55mm

BEAM ANGLE



BODY COLOR



REFLECTOR COLOR



## GDH55F-2

LIGHT SOURCE 5W\*2

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 800lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF




0-10V

PHASE CUT





CUT SIZE:148\*75mm

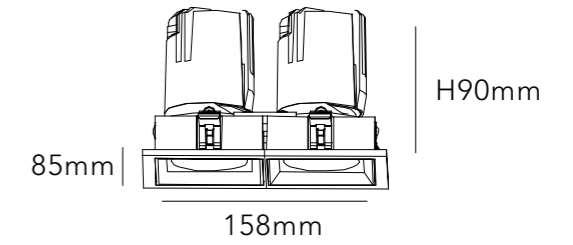

BEAM ANGLE



BODY COLOR



WHITE

BLACK

REFLECTOR COLOR



WHITE

BLACK

CHROME

## GDH75F-2

LIGHT SOURCE 12W\*2

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 1920lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF




0-10V




PHASE CUT



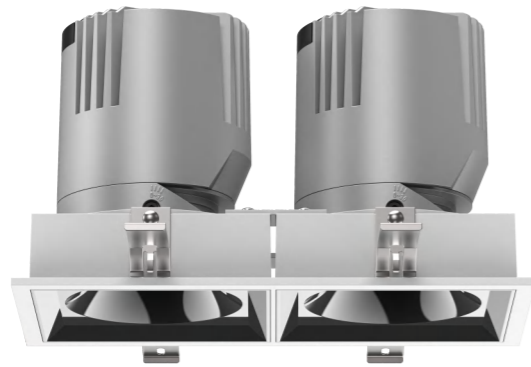

CUT SIZE:188\*95mm

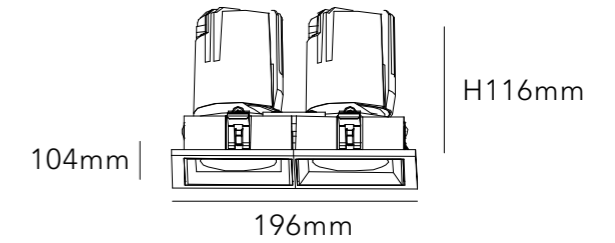

BEAM ANGLE



BODY COLOR



WHITE

BLACK

REFLECTOR COLOR



WHITE

BLACK

CHROME

## GDH95F-2

LIGHT SOURCE 20W\*2

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 3200lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF




0-10V




PHASE CUT



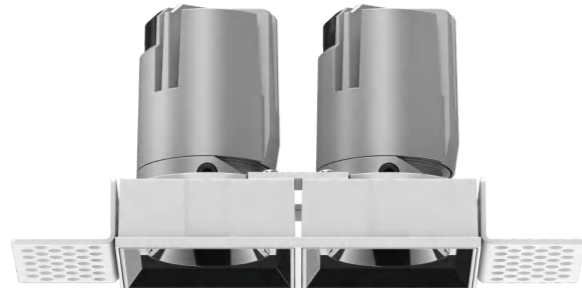

CUT SIZE:105\*53mm

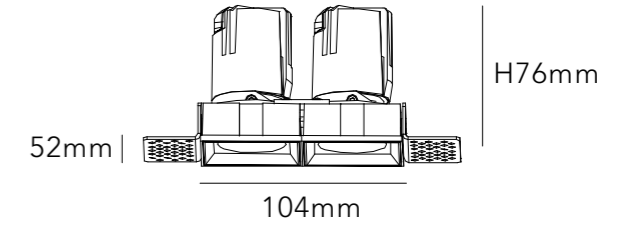

BEAM ANGLE



BODY COLOR



WHITE

BLACK

REFLECTOR COLOR



WHITE

BLACK

CHROME

## GDH55F-2 SLIM

LIGHT SOURCE 5W\*2

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 800lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF




0-10V




PHASE CUT



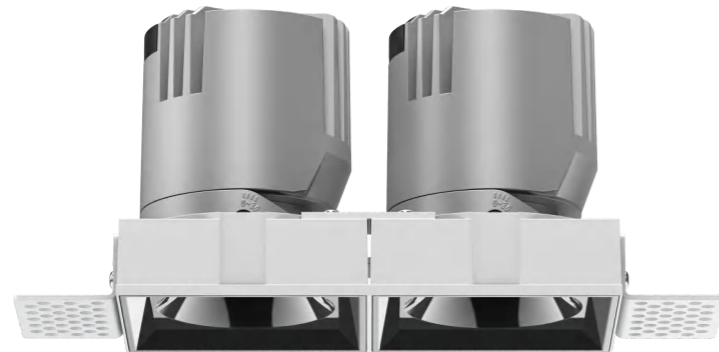

CUT SIZE:145\*73mm

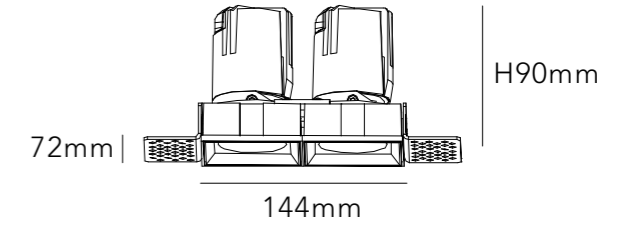

BEAM ANGLE



BODY COLOR



WHITE

BLACK

REFLECTOR COLOR



WHITE

BLACK

CHROME

## GDH75F-2 SLIM

LIGHT SOURCE 12W\*2

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 1920lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF




0-10V




PHASE CUT



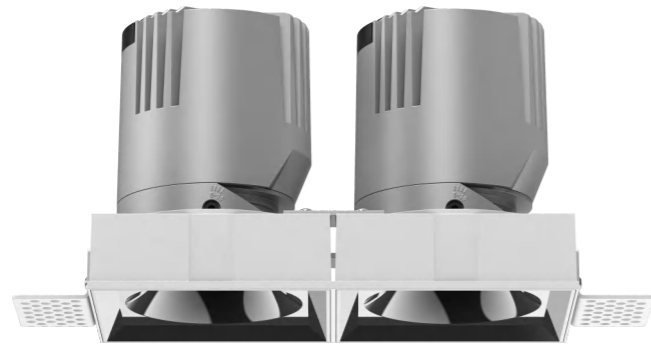

CUT SIZE:185\*93mm

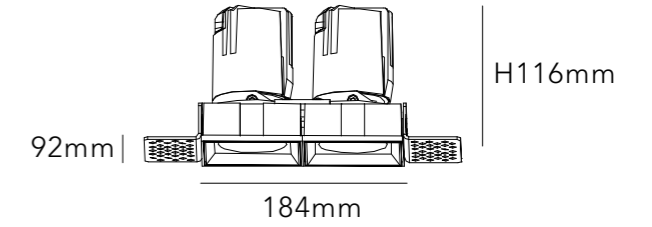

BEAM ANGLE



BODY COLOR



WHITE

BLACK

REFLECTOR COLOR



WHITE

BLACK

CHROME

## GDH95F-2 SLIM

LIGHT SOURCE 20W\*2

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 3200lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT







CUT SIZE:160\*55mm

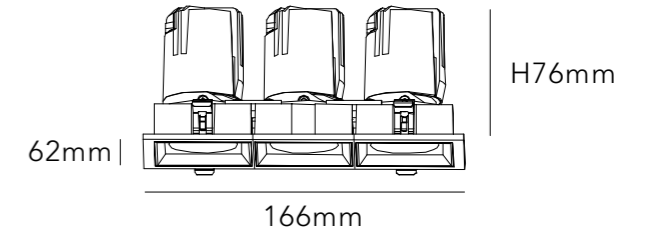

BEAM ANGLE



BODY COLOR



WHITE

BLACK

REFLECTOR COLOR



WHITE

BLACK

CHROME

### GDH55F-3

LIGHT SOURCE 5W\*3

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 1440lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:220\*75mm

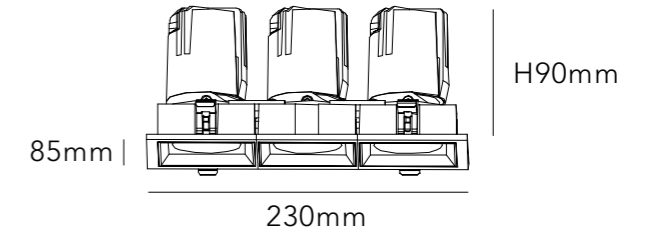

BEAM ANGLE



BODY COLOR



WHITE

BLACK

REFLECTOR COLOR



WHITE

BLACK

CHROME

## GDH75F-3

LIGHT SOURCE 12W\*3

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 1920lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF




0-10V



PHASE CUT



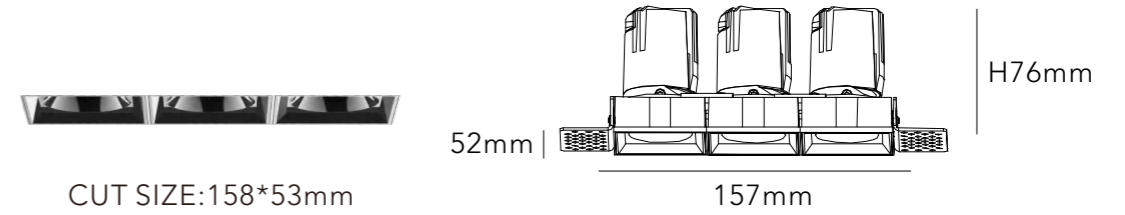

BEAM ANGLE



BODY COLOR



REFLECTOR COLOR



**GDH55F-3 SLIM**

LIGHT SOURCE 5W\*3

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 1440lm

MATERIAL ALUMINIUM


DIMMING OPTION ON/OFF



0-10V

PHASE CUT



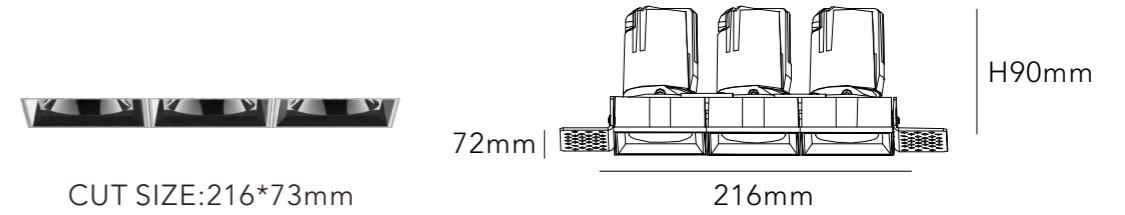

BEAM ANGLE



BODY COLOR



REFLECTOR COLOR



## GDH75F-3 SLIM

LIGHT SOURCE 12W\*3

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 2880lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF




0-10V

PHASE CUT






CUT SIZE:105\*105mm

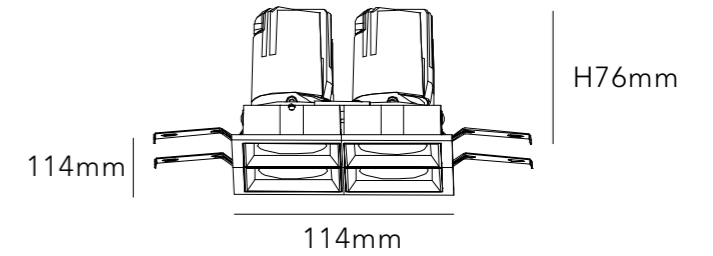


BEAM ANGLE



BODY COLOR



WHITE



BLACK

REFLECTOR COLOR



WHITE



BLACK



CHROME

## GDH55F-4

LIGHT SOURCE 5W\*4

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 1600lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF




0-10V




PHASE CUT



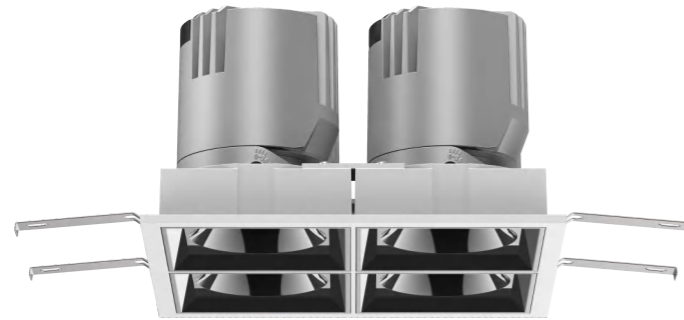

CUT SIZE:148\*148mm

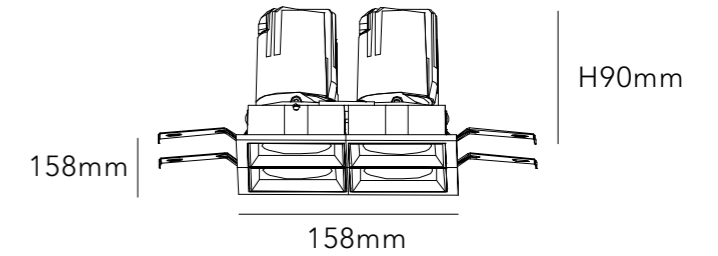


BEAM ANGLE



BODY COLOR



WHITE



BLACK

REFLECTOR COLOR



WHITE



BLACK



CHROME

## GDH75F-4

LIGHT SOURCE 12W\*4

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 3840lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF




0-10V



PHASE CUT



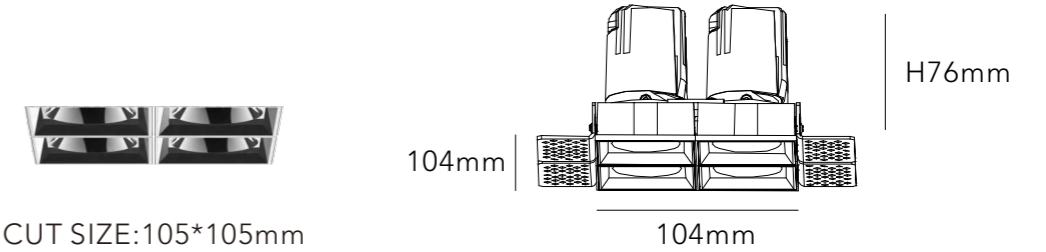

**BEAM ANGLE**



**BODY COLOR**



**REFLECTOR COLOR**



**GDH55F-4 SLIM**

LIGHT SOURCE 5W\*4

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 1600lm

MATERIAL ALUMINIUM



DIMMING OPTION ON/OFF



0-10V

PHASE CUT



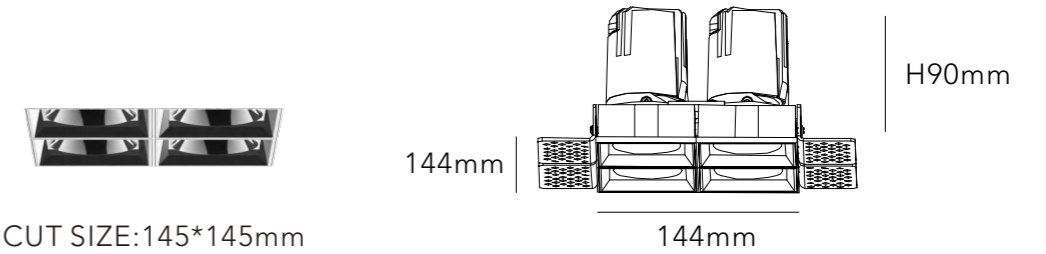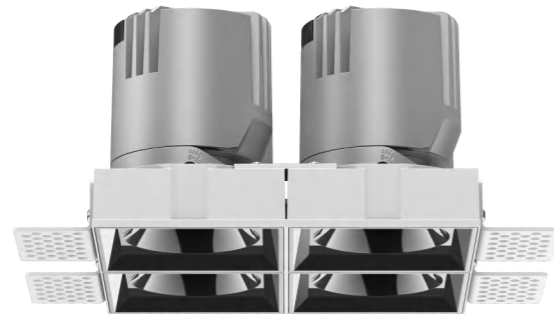

BEAM ANGLE



BODY COLOR



REFLECTOR COLOR



## GDH75F-4 SLIM

LIGHT SOURCE 12W\*4

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 3840lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V


PHASE CUT







CUT SIZE:35mm



H76.5mm

40mm

### GJK35

LIGHT SOURCE 7W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 560lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V



PHASE CUT



**BEAM ANGLE**



**BODY COLOR**



WHITE



BLACK

**REFLECTOR COLOR**




WHITE



BLACK



CUT SIZE:45mm



H88.5mm

50mm

BEAM ANGLE



BODY COLOR



WHITE



BLACK

REFLECTOR COLOR



WHITE



BLACK

GJK45

LIGHT SOURCE 10W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 800lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V



PHASE CUT





BEAM ANGLE



BODY COLOR




REFLECTOR COLOR



P153



CUT SIZE:55mm



H106.5mm

62mm

GJK55

LIGHT SOURCE 12W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 960lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT



P154



CUT SIZE:55mm



H106.5mm

70mm

## GJK55 SLIM

LIGHT SOURCE 12W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 960lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V



PHASE CUT



### BEAM ANGLE



### BODY COLOR



WHITE



BLACK

### REFLECTOR COLOR



WHITE




BLACK



CHROME



CUT SIZE:55\*55mm

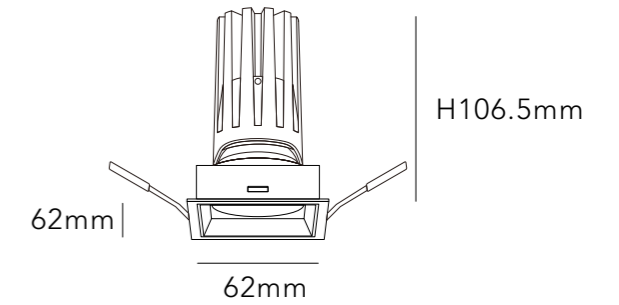

BEAM ANGLE



BODY COLOR



WHITE



BLACK

REFLECTOR COLOR



WHITE



BLACK



CHROME

GJK55F

LIGHT SOURCE 12W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 960lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V



PHASE CUT





BEAM ANGLE



BODY COLOR



WHITE



BLACK

REFLECTOR COLOR



WHITE



BLACK




CHROME

P159



CUT SIZE:55\*55mm

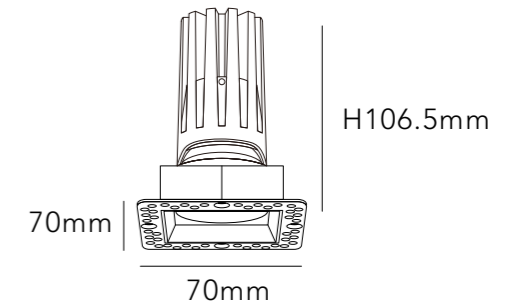

GJK55F SLIM

LIGHT SOURCE 12W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 960lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT



P160



CUT SIZE:110\*55mm

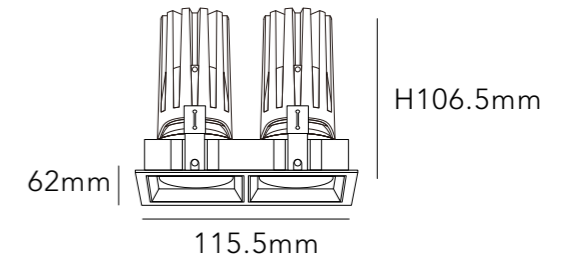

BEAM ANGLE



BODY COLOR



WHITE

BLACK

REFLECTOR COLOR



WHITE

BLACK

CHROME

## GJK55F-2

LIGHT SOURCE 12W\*2

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 1920lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:110\*55mm

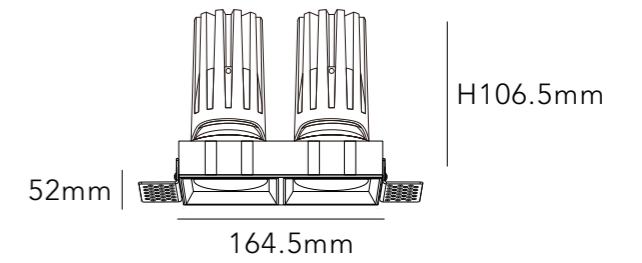

BEAM ANGLE



BODY COLOR



WHITE

BLACK

REFLECTOR COLOR



WHITE

BLACK

CHROME

## GJK55F-2 SLIM

LIGHT SOURCE 12W\*2

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 1920lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT







CUT SIZE:75mm



82mm

H115mm

BEAM ANGLE



BODY COLOR



WHITE



BLACK

REFLECTOR COLOR



WHITE



BLACK



CHROME

GJK75

LIGHT SOURCE 18W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 1440lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:95mm



H146mm

105mm

BEAM ANGLE



BODY COLOR



WHITE



BLACK

REFLECTOR COLOR



WHITE



BLACK



CHROME

GJK95

LIGHT SOURCE 25W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 2000lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:75mm



H115mm

95mm

## GJK75 SLIM

LIGHT SOURCE 18W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 1440lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V



PHASE CUT



**BEAM ANGLE**



15°



24°



36°



55°

**BODY COLOR**



WHITE



BLACK

**REFLECTOR COLOR**



WHITE




BLACK



CHROME



CUT SIZE:95mm



H146mm

120mm

## GJK95 SLIM

LIGHT SOURCE 25W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 2000lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V



PHASE CUT



**BEAM ANGLE**



**BODY COLOR**



WHITE



BLACK

**REFLECTOR COLOR**



WHITE




BLACK



CHROME



CUT SIZE:75\*75mm

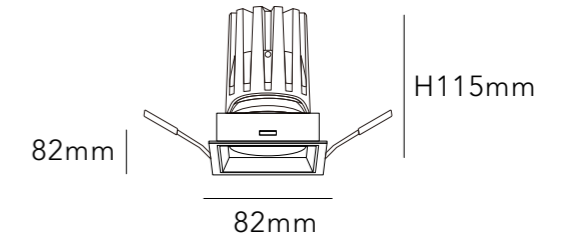

BEAM ANGLE



BODY COLOR



WHITE



BLACK

REFLECTOR COLOR



WHITE



BLACK



CHROME

## GJK75F

LIGHT SOURCE 18W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 1440lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:95\*95mm

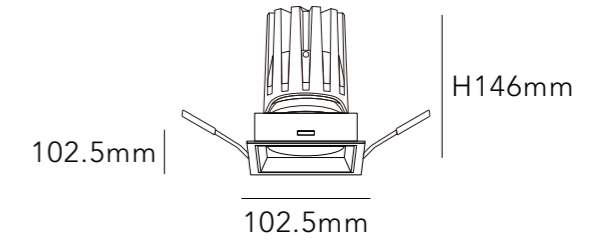

BEAM ANGLE



BODY COLOR



WHITE



BLACK

REFLECTOR COLOR



WHITE



BLACK



CHROME

## GJK95F

LIGHT SOURCE 25W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 2000lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:75\*75mm

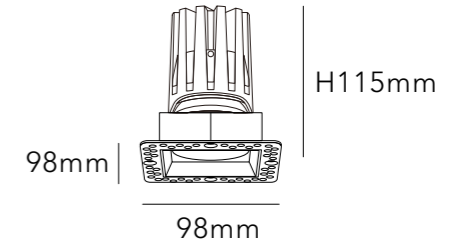

BEAM ANGLE



BODY COLOR



WHITE



BLACK

REFLECTOR COLOR



WHITE



BLACK



CHROME

## GJK75F SLIM

LIGHT SOURCE 18W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 1440lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:95\*95mm

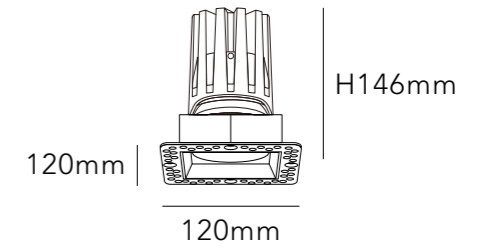

BEAM ANGLE



BODY COLOR



WHITE



BLACK

REFLECTOR COLOR



WHITE



BLACK



CHROME

## GJK95F SLIM

LIGHT SOURCE 25W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 2000lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT







CUT SIZE:150\*75mm

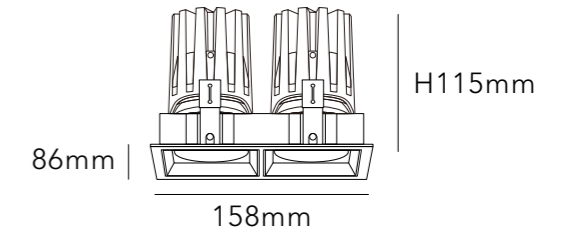

BEAM ANGLE



BODY COLOR



WHITE

BLACK

REFLECTOR COLOR



WHITE

BLACK

CHROME

## GJK75F-2

LIGHT SOURCE 18W\*2

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 2880lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:190\*95mm

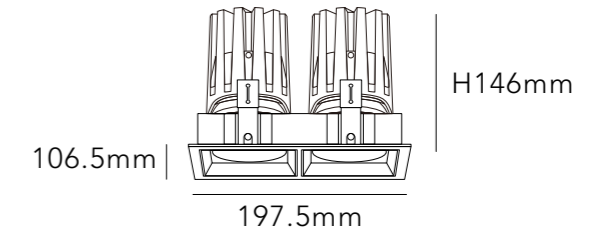

BEAM ANGLE



BODY COLOR



WHITE

BLACK

REFLECTOR COLOR



WHITE

BLACK

CHROME

## GJK95F-2

LIGHT SOURCE 25W\*2

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 4000lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:150\*72mm

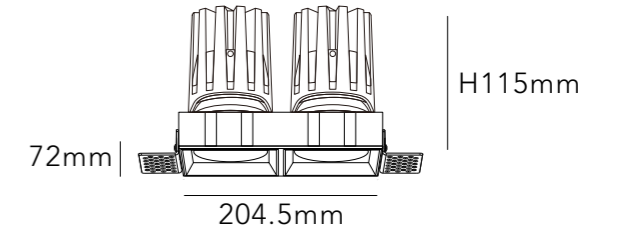

BEAM ANGLE



BODY COLOR



WHITE

BLACK

REFLECTOR COLOR



WHITE

BLACK

CHROME

## GJK75F-2 SLIM

LIGHT SOURCE 18W\*2

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 2880lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:190\*90.5mm

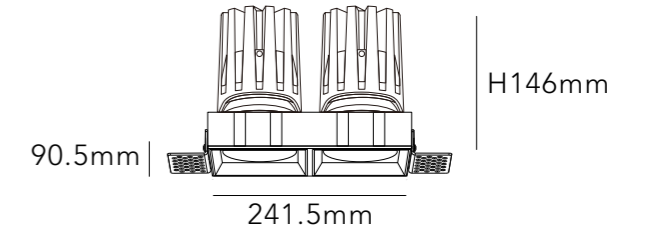

BEAM ANGLE



BODY COLOR



REFLECTOR COLOR



## GJK95F-2 SLIM

LIGHT SOURCE 25W\*2

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 4000lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:55mm



H75mm

62mm

## GHR55

LIGHT SOURCE 7W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 560lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V



PHASE CUT



### BEAM ANGLE



### BODY COLOR



WHITE



BLACK

### REFLECTOR COLOR



WHITE




BLACK



CHROME



CUT SIZE:75mm

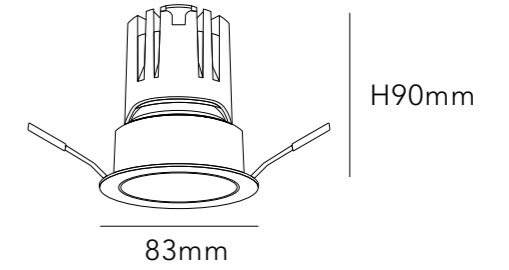

**BEAM ANGLE**



**BODY COLOR**



WHITE



BLACK

**REFLECTOR COLOR**



WHITE



BLACK



CHROME

**GHR75**

LIGHT SOURCE 12W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 960lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V



PHASE CUT





BEAM ANGLE




BODY COLOR



REFLECTOR COLOR



CUT SIZE:95mm



H114mm

105mm

GHR95

LIGHT SOURCE 20W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 1600lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:55mm



H75mm

70mm

## GHR55 SLIM

LIGHT SOURCE 7W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 560lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V

PHASE CUT



**BEAM ANGLE**



**BODY COLOR**



WHITE



BLACK

**REFLECTOR COLOR**



WHITE



BLACK




CHROME





CUT SIZE:75mm



H90mm

95mm

## GHR75 SLIM

LIGHT SOURCE 12W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 960lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V



PHASE CUT



**BEAM ANGLE**



**BODY COLOR**



WHITE



BLACK

**REFLECTOR COLOR**



WHITE



BLACK



CHROME



BEAM ANGLE



BODY COLOR




REFLECTOR COLOR



P199



CUT SIZE:95mm



H114mm  
120mm

GHR95 SLIM

LIGHT SOURCE 20W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 1600lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT



P200



CUT SIZE:55\*55mm

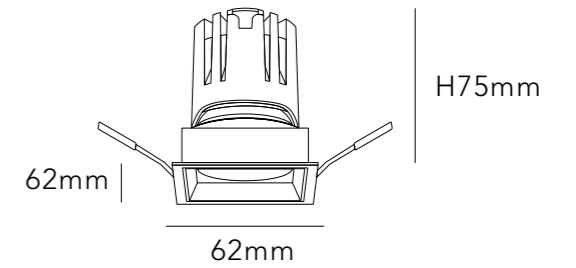

BEAM ANGLE



BODY COLOR



WHITE



BLACK

REFLECTOR COLOR



WHITE



BLACK



CHROME

**GHR55F**

LIGHT SOURCE 7W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 560lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:75\*75mm

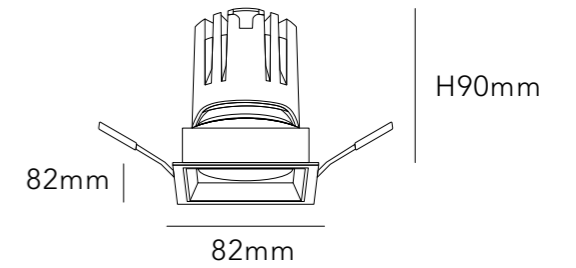

BEAM ANGLE



BODY COLOR



WHITE



BLACK

REFLECTOR COLOR



WHITE



BLACK



CHROME

**GHR75F**

LIGHT SOURCE 12W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 960lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:95\*95mm

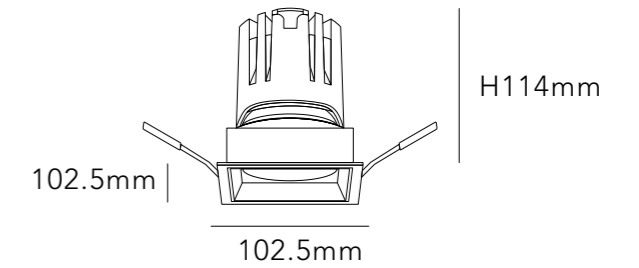

BEAM ANGLE



BODY COLOR



WHITE



BLACK

REFLECTOR COLOR



WHITE



BLACK



CHROME

P205

**GHR95F**

LIGHT SOURCE 20W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 1600lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT



P206



CUT SIZE:55\*55mm

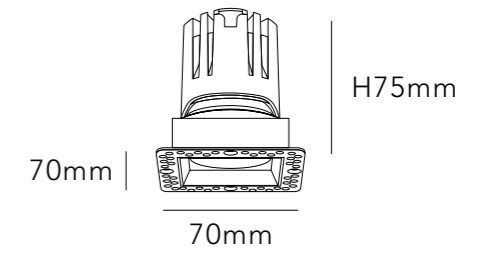

BEAM ANGLE



BODY COLOR



WHITE



BLACK

REFLECTOR COLOR



WHITE



BLACK



CHROME

GHR55F SLIM

LIGHT SOURCE 7W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 560lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:75\*75mm

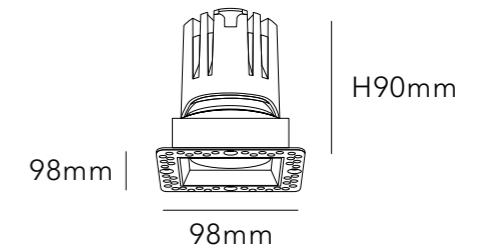

BEAM ANGLE



BODY COLOR



WHITE



BLACK

REFLECTOR COLOR



WHITE



BLACK



CHROME

## GHR75F SLIM

LIGHT SOURCE 12W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 960lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:95\*95mm

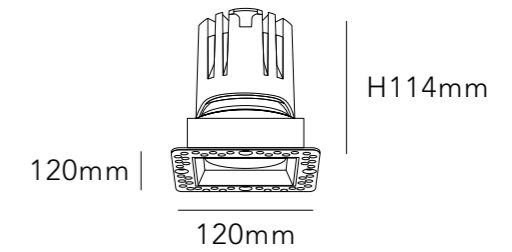

BEAM ANGLE



BODY COLOR



WHITE



BLACK

REFLECTOR COLOR



WHITE



BLACK



CHROME

## GHR95F SLIM

LIGHT SOURCE 20W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 1600lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF




0-10V




PHASE CUT





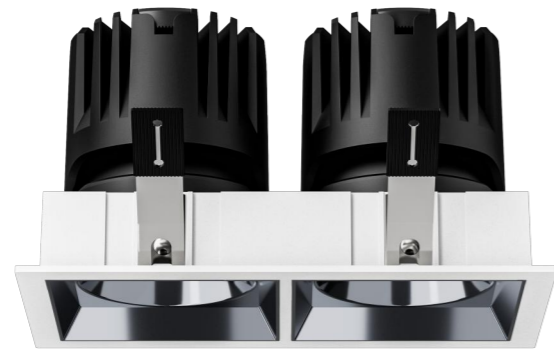

CUT SIZE:110\*55mm

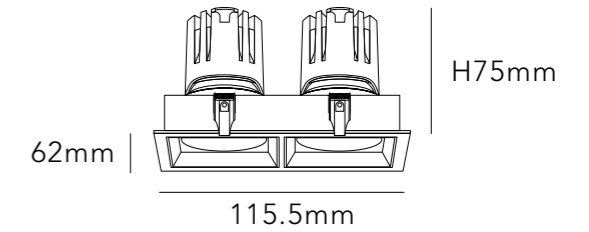

BEAM ANGLE



BODY COLOR



WHITE



BLACK

REFLECTOR COLOR



WHITE



BLACK



CHROME

**GHR55F-2**

LIGHT SOURCE 7W\*2

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 1120lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF





0-10V




PHASE CUT



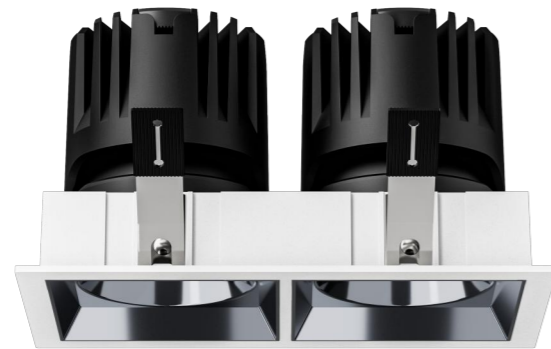

CUT SIZE:150\*75mm

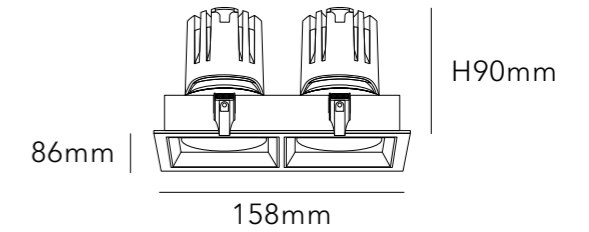

BEAM ANGLE



BODY COLOR



WHITE



BLACK

REFLECTOR COLOR



WHITE



BLACK



CHROME

## GHR75F-2

LIGHT SOURCE 12W\*2

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 1920lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF




0-10V




PHASE CUT





CUT SIZE:190\*95mm

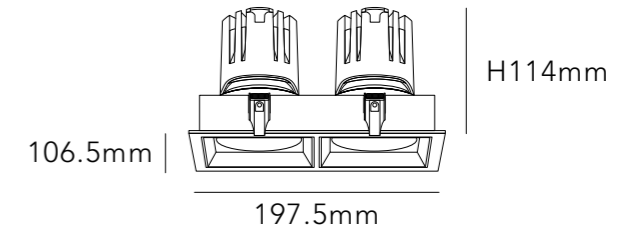

BEAM ANGLE



BODY COLOR



REFLECTOR COLOR



## GHR95F-2

LIGHT SOURCE 20W\*2

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 3200lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF




0-10V




PHASE CUT



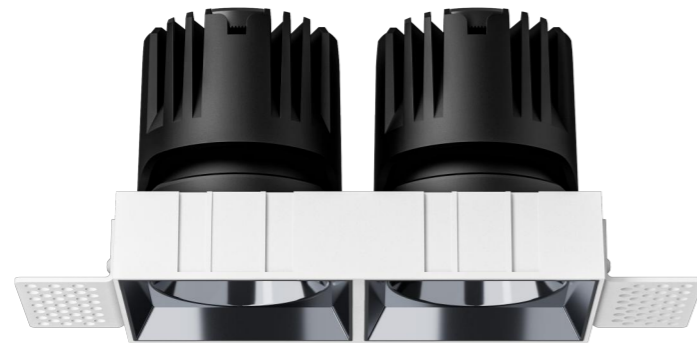

CUT SIZE:110\*52mm

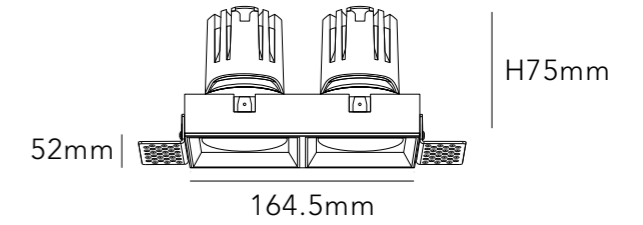

BEAM ANGLE



BODY COLOR



WHITE

BLACK

REFLECTOR COLOR



WHITE

BLACK

CHROME

## GHR55F-2 SLIM

LIGHT SOURCE 7W\*2

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 1120lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF




0-10V




PHASE CUT



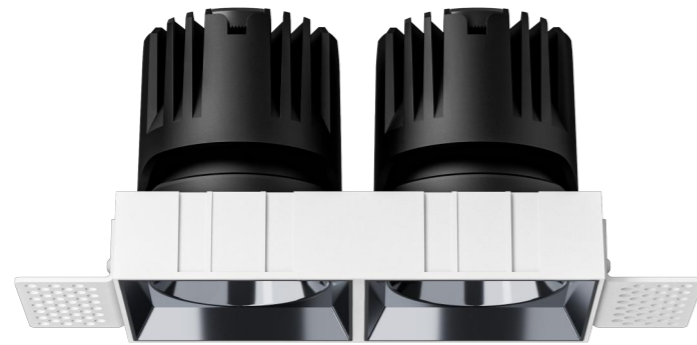

CUT SIZE:150\*72mm

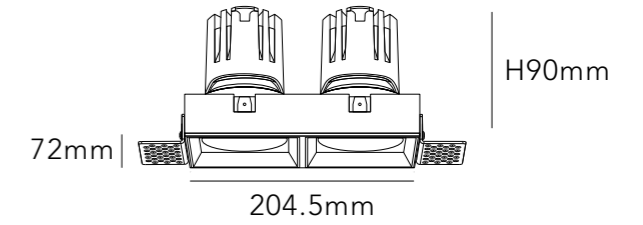

BEAM ANGLE



BODY COLOR



WHITE

BLACK

REFLECTOR COLOR



WHITE

BLACK

CHROME

## GHR75F-2 SLIM

LIGHT SOURCE 12W\*2

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 1920lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF




0-10V




PHASE CUT



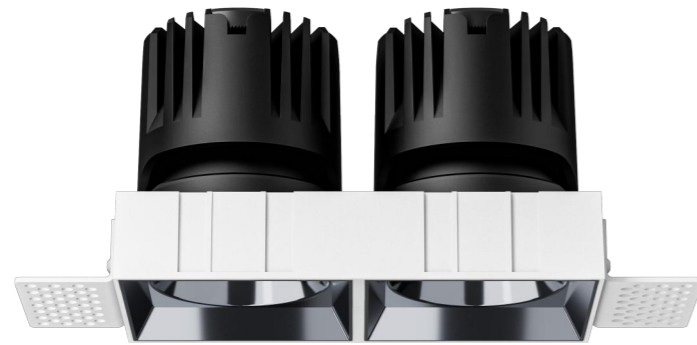


CUT SIZE:190\*90.5mm

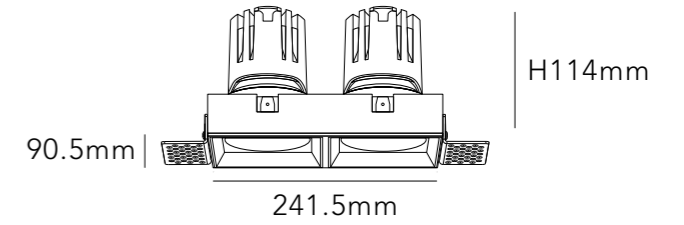

BEAM ANGLE



BODY COLOR

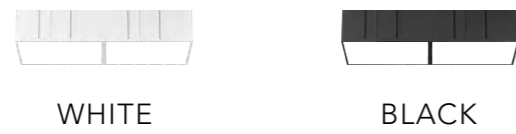

WHITE

BLACK

REFLECTOR COLOR



WHITE

BLACK

CHROME

## GHR95F-2 SLIM

LIGHT SOURCE 20W\*2

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 3200lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:75mm



H88.2mm

82mm

## GHR750A

**BEAM ANGLE**



**BODY COLOR**



WHITE



BLACK

LIGHT SOURCE 12W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 960lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:75mm

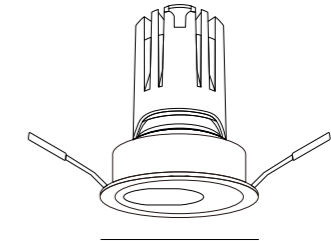

H115mm

82mm

## GHR75OB

LIGHT SOURCE 18W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 1440lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V



PHASE CUT



### BEAM ANGLE



### BODY COLOR



WHITE




BLACK





CUT SIZE:75mm



H87.5mm


95mm

## GHR750A SLIM

**BEAM ANGLE**



**BODY COLOR**



WHITE



BLACK

LIGHT SOURCE 12W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 1600lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:75mm



H115mm

95mm

## GHR75OB SLIM

LIGHT SOURCE 18W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 1440lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V



PHASE CUT



### BEAM ANGLE



15°



24°



36°



55°

### BODY COLOR




WHITE



BLACK



CUT SIZE:75mm



H88.2mm

82mm

## GHR75RA

LIGHT SOURCE 12W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 960lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V



PHASE CUT



**BEAM ANGLE**




**BODY COLOR**




WHITE



BLACK



CUT SIZE:75mm



H115mm

82mm

## GHR75RB

**BEAM ANGLE**



**BODY COLOR**



WHITE



BLACK

LIGHT SOURCE 18W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 1440lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:75mm



H87.5mm


95mm

## GHR75RA SLIM

**BEAM ANGLE**



**BODY COLOR**



WHITE



BLACK

LIGHT SOURCE 12W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 960lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:75mm



H115mm


95mm

## GHR75RB SLIM

### BEAM ANGLE



### BODY COLOR



WHITE



BLACK

LIGHT SOURCE 18W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 1440lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:55mm

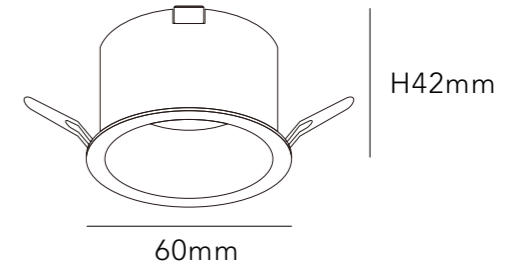

BEAM ANGLE



BODY COLOR



WHITE



BLACK

**GLD55**

LIGHT SOURCE 7W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 560lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:75mm

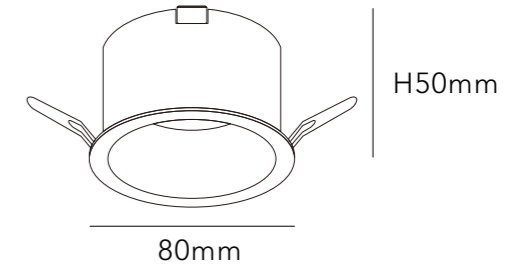

BEAM ANGLE



BODY COLOR



WHITE



BLACK

**GLD75**

LIGHT SOURCE 12W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 960lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT







CUT SIZE:95mm

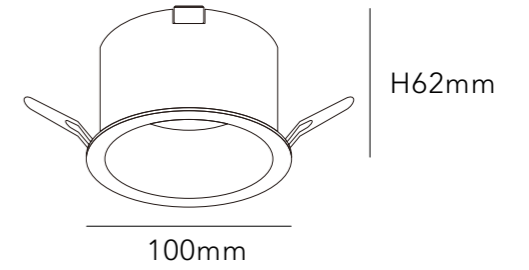

BEAM ANGLE



BODY COLOR



WHITE



BLACK

**GLD95**

LIGHT SOURCE 20W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 1600lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:55mm



H51mm

62.5mm

BEAM ANGLE



BODY COLOR



WHITE




BLACK

REFLECTOR COLOR



WHITE



BLACK



CHROME

GJS55R

LIGHT SOURCE 7W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 560lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:75mm



85mm

H59mm

BEAM ANGLE



BODY COLOR



WHITE




BLACK

REFLECTOR COLOR



WHITE



BLACK



CHROME

GJS75R

LIGHT SOURCE 12W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 960lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:95mm



H73mm

105mm

BEAM ANGLE



BODY COLOR



WHITE




BLACK

REFLECTOR COLOR



WHITE



BLACK



CHROME

GJS95R

LIGHT SOURCE 20W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 1600lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:55\*55mm

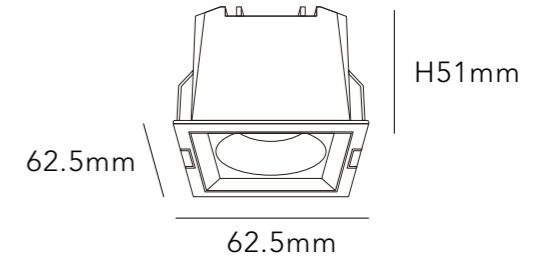

BEAM ANGLE



BODY COLOR



REFLECTOR COLOR



**GJS55F**

LIGHT SOURCE 7W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 560lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:75\*75mm

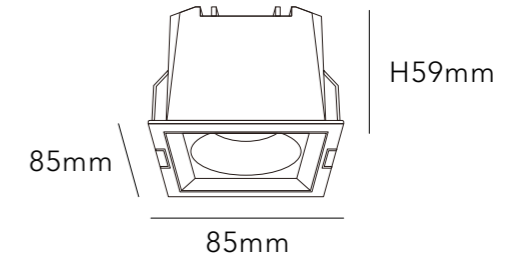

BEAM ANGLE



BODY COLOR



REFLECTOR COLOR



**GJS75F**

LIGHT SOURCE 12W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 960lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:95\*95mm

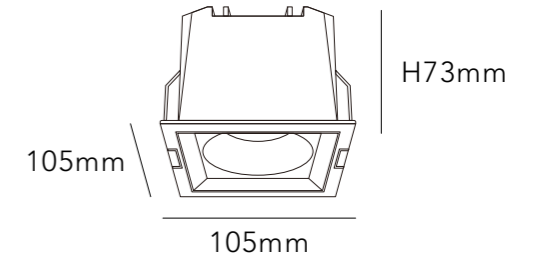

BEAM ANGLE



BODY COLOR




WHITE




BLACK


REFLECTOR COLOR



WHITE



BLACK



CHROME

GJS95F

LIGHT SOURCE 20W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 1600lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:110\*55mm

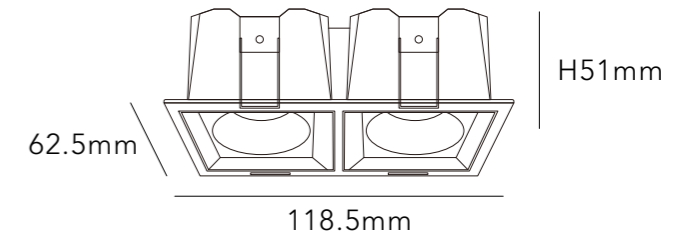

BEAM ANGLE



BODY COLOR



REFLECTOR COLOR



**GJS55F-2**

LIGHT SOURCE 7W\*2

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 1120lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT







CUT SIZE:150\*75mm

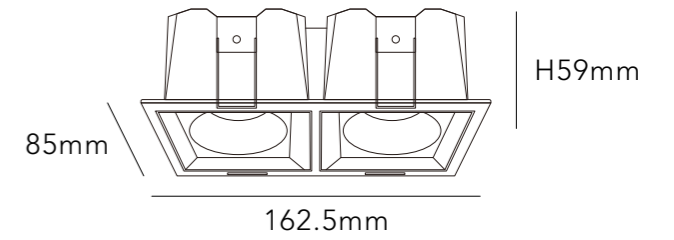

BEAM ANGLE



BODY COLOR



REFLECTOR COLOR



**GJS75F-2**

LIGHT SOURCE 12W\*2

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 1920lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF




0-10V




PHASE CUT



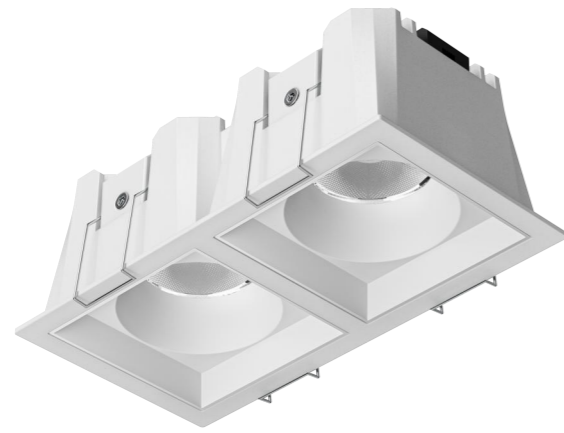

CUT SIZE:190\*95mm

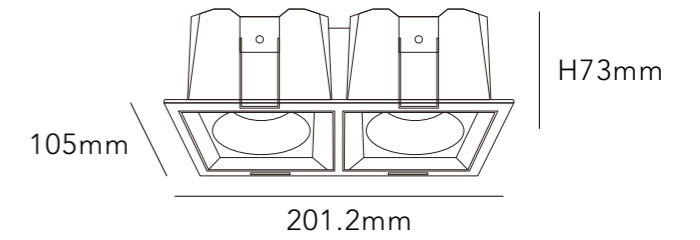

BEAM ANGLE



BODY COLOR



REFLECTOR COLOR



**GJS95F-2**

LIGHT SOURCE 20W\*2

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 3200lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V



PHASE CUT






BEAM ANGLE




BODY COLOR




REFLECTOR COLOR



P265

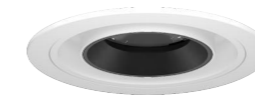

CUT SIZE:55mm

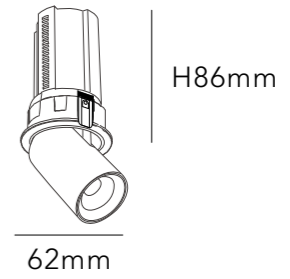

GR323

LIGHT SOURCE 7W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 10°/15°/24°/38°/50°

RA >90

LUMENS 560lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V



PHASE CUT




P266



BEAM ANGLE




BODY COLOR




REFLECTOR COLOR



P267

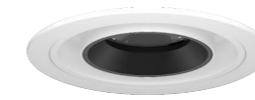

CUT SIZE:75mm



H104mm

84mm

GR324

LIGHT SOURCE 12W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 10°/15°/24°/38°/50°

RA >90

LUMENS 960lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V



PHASE CUT




P268



BEAM ANGLE



BODY COLOR




REFLECTOR COLOR



P269



CUT SIZE:102mm



H129mm

105mm

GR325

LIGHT SOURCE 20W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 10°/15°/24°/38°/50°

RA >90

LUMENS 1600lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V



PHASE CUT



P270



BEAM ANGLE



BODY COLOR




REFLECTOR COLOR



P271



CUT SIZE:55mm



H86mm

76mm

GR323 SILM

LIGHT SOURCE 7W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 10°/15°/24°/38°/50°

RA >90

LUMENS 560lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V



PHASE CUT



P272



BEAM ANGLE



BODY COLOR




REFLECTOR COLOR



P273



CUT SIZE:75mm



H104mm

96mm

GR324 SILM

LIGHT SOURCE 12W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 10°/15°/24°/38°/50°

RA >90

LUMENS 960lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT



P274



CUT SIZE:95mm



H127mm

116mm

## GR325 SILM

LIGHT SOURCE 20W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 10°/15°/24°/38°/50°

RA >90

LUMENS 1600lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V



PHASE CUT



**BEAM ANGLE**



10°



15°



24°



38°



50°

**BODY COLOR**



WHITE




BLACK

**REFLECTOR COLOR**



BLACK



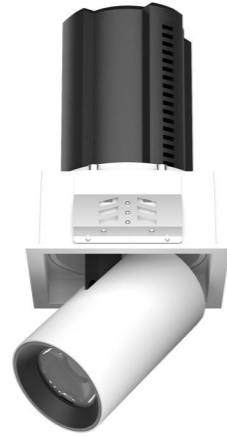

BEAM ANGLE



BODY COLOR




REFLECTOR COLOR



P277



CUT SIZE:55\*55mm

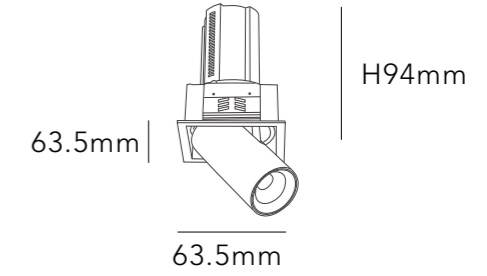

GF323

LIGHT SOURCE 7W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 10°/15°/24°/38°/50°

RA >90

LUMENS 560lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF




0-10V



PHASE CUT



P278

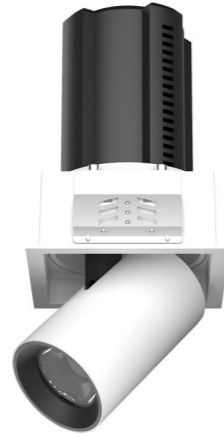

BEAM ANGLE



BODY COLOR




REFLECTOR COLOR



P279



CUT SIZE:75\*75mm

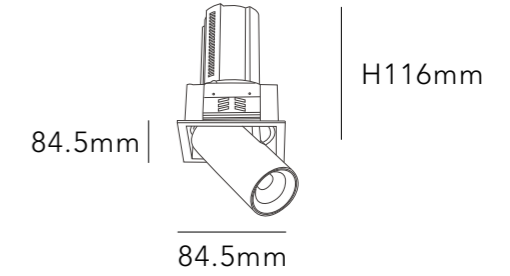

GF324

LIGHT SOURCE 12W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 10°/15°/24°/38°/50°

RA >90

LUMENS 960lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF




0-10V



PHASE CUT



P280

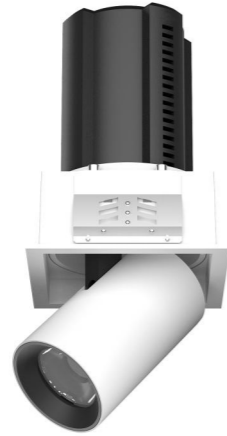

BEAM ANGLE



BODY COLOR




REFLECTOR COLOR



P281



CUT SIZE:95\*95mm

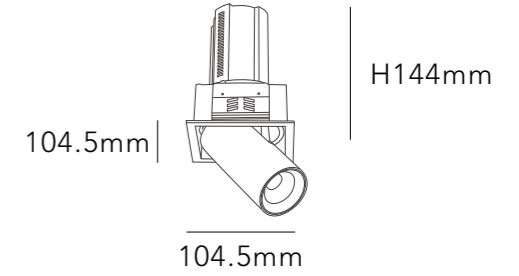

GF325

LIGHT SOURCE 20W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 10°/15°/24°/38°/50°

RA >90

LUMENS 1600lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF





0-10V

PHASE CUT

P282



CUT SIZE:55\*58mm

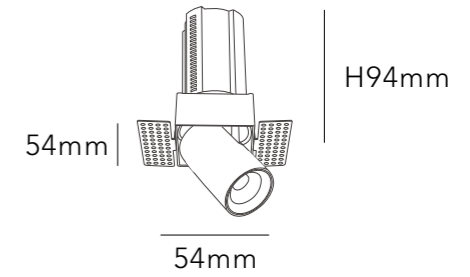

BEAM ANGLE



BODY COLOR



WHITE



BLACK

REFLECTOR COLOR



BLACK

## GF323 SLIM

LIGHT SOURCE 7W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 10°/15°/24°/38°/50°

RA >90

LUMENS 560lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:75\*78mm

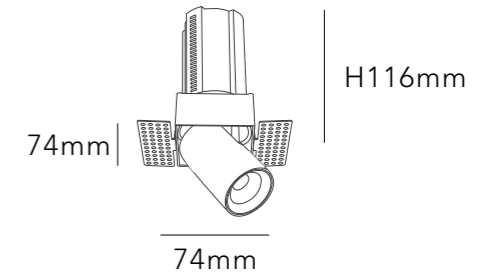

BEAM ANGLE



BODY COLOR



WHITE



BLACK

REFLECTOR COLOR



BLACK

## GF324 SLIM

LIGHT SOURCE 12W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 10°/15°/24°/38°/50°

RA >90

LUMENS 960lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V



PHASE CUT





BEAM ANGLE



BODY COLOR




REFLECTOR COLOR



P287



CUT SIZE:95\*98mm

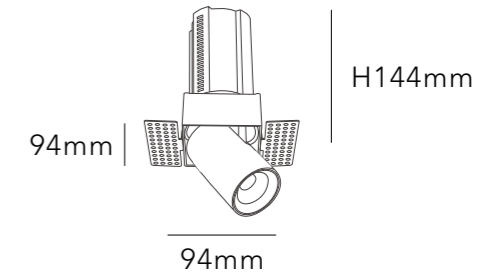

GF325 SLIM

LIGHT SOURCE 20W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 10°/15°/24°/38°/50°

RA >90

LUMENS 560lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF




0-10V



PHASE CUT



P288

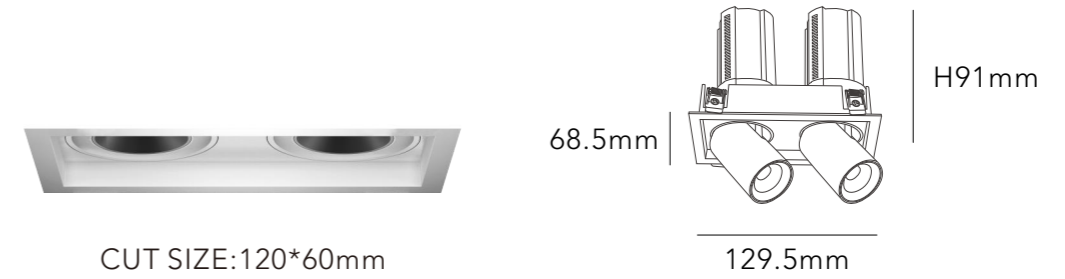

BEAM ANGLE



BODY COLOR



REFLECTOR COLOR



**GF323-2**

LIGHT SOURCE 7W\*2

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V



ANGLE 10°/15°/24°/38°/50°

RA >90

LUMENS 1120lm


MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF





CUT SIZE:165\*80mm

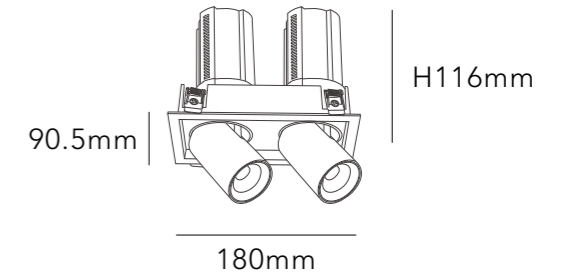

BEAM ANGLE



BODY COLOR



WHITE

BLACK

REFLECTOR COLOR



BLACK

**GF324-2**

LIGHT SOURCE 12W\*2

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 10°/15°/24°/38°/50°

RA >90

LUMENS 1920lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF




0-10V



PHASE CUT





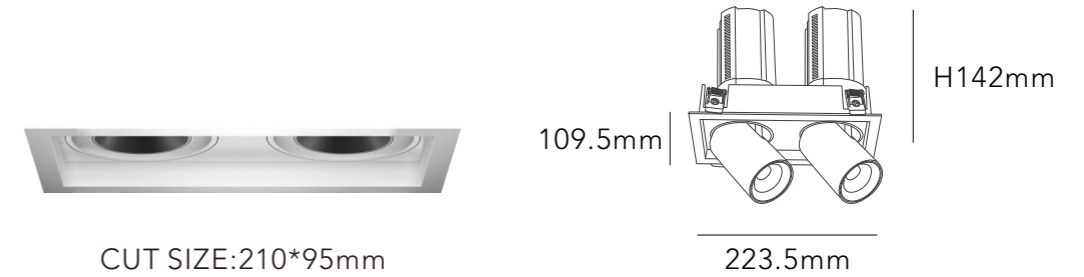

BEAM ANGLE



BODY COLOR



REFLECTOR COLOR



**GF325-2**

LIGHT SOURCE 20W\*2

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 10°/15°/24°/38°/50°

RA >90

LUMENS 3200lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF




0-10V

PHASE CUT





CUT SIZE:116\*58mm

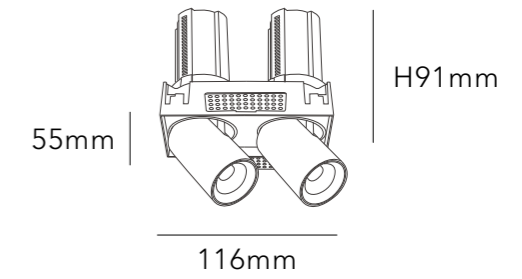

BEAM ANGLE



BODY COLOR



WHITE

BLACK

REFLECTOR COLOR



BLACK

## GF323-2 SLIM

LIGHT SOURCE 7W\*2

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 10°/15°/24°/38°/50°

RA >90

LUMENS 1120lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:162\*78mm

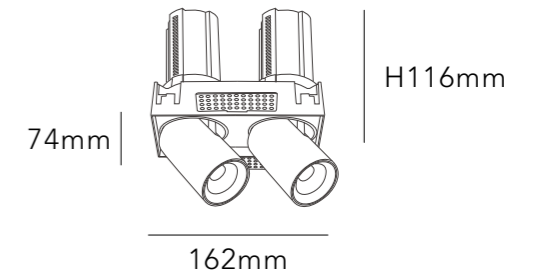

BEAM ANGLE



BODY COLOR



WHITE

BLACK

REFLECTOR COLOR



BLACK

## GF324-2 SLIM

LIGHT SOURCE 12W\*2

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 10°/15°/24°/38°/50°

RA >90

LUMENS 1920lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:208\*98mm

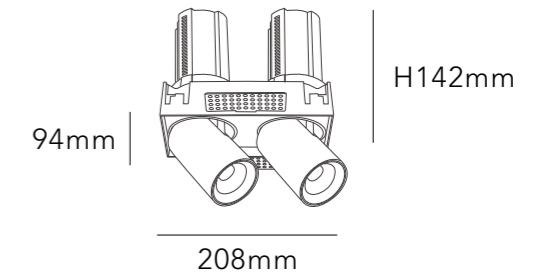

BEAM ANGLE



BODY COLOR



WHITE

BLACK

REFLECTOR COLOR



BLACK

**GF325-2 SLIM**

LIGHT SOURCE 20W\*2

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 10°/15°/24°/38°/50°

RA >90

LUMENS 3200lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:75mm



H109mm

90mm

BEAM ANGLE



BODY COLOR



WHITE



BLACK

## GTY75R

LIGHT SOURCE 20W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 1600lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:95mm



H125mm

115mm

**BEAM ANGLE**



**BODY COLOR**



WHITE



BLACK

**GTY95R**

LIGHT SOURCE 30W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 1600lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:115mm



H140mm

130mm

BEAM ANGLE



BODY COLOR



WHITE



BLACK

## GTY115R

LIGHT SOURCE 40W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 1600lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:75\*75mm

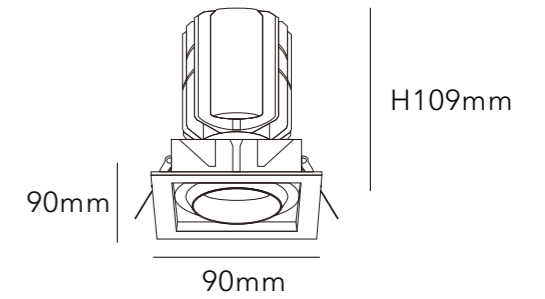

**BEAM ANGLE**



**BODY COLOR**



WHITE



BLACK

**GTY75F**

LIGHT SOURCE 20W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 1600lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT







CUT SIZE:95\*95mm

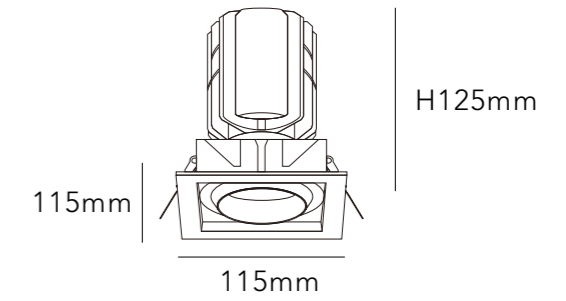

BEAM ANGLE



BODY COLOR



WHITE



BLACK

**GTU95F**

LIGHT SOURCE 30W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 1600lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:115\*115mm

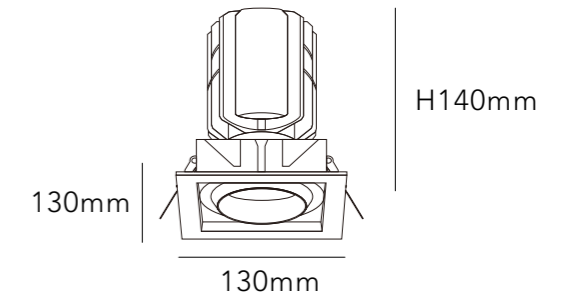

BEAM ANGLE



BODY COLOR



WHITE



BLACK

**GTY115F**

LIGHT SOURCE 40W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 1600lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:150\*75mm

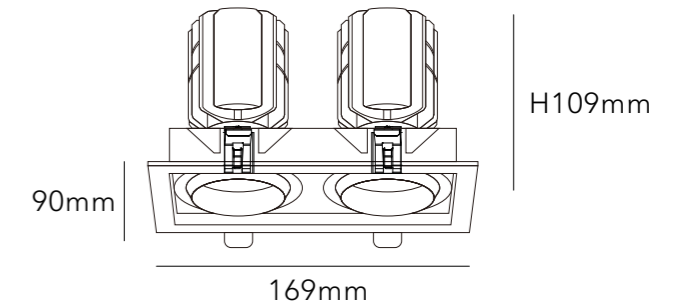

BEAM ANGLE



BODY COLOR



WHITE



BLACK

## GTY75F-2

LIGHT SOURCE 20W\*2

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/36°/55°

RA >90

LUMENS 3200lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF




0-10V



PHASE CUT



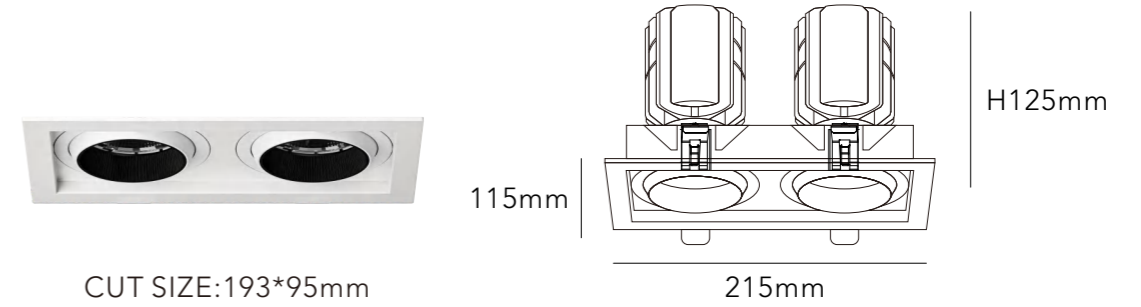

BEAM ANGLE



BODY COLOR



**GTY95F-2**


LIGHT SOURCE	30W*2
IP	IP20
TEMP	3000K/4000K/6000K
VOLTAGE	AC220-240V
ANGLE	15°/24°/36°/55°
RA	>90
LUMENS	3200lm
MATERIAL	ALUMINIUM
DIMMING OPTION	ON/OFF



0-10V

PHASE CUT



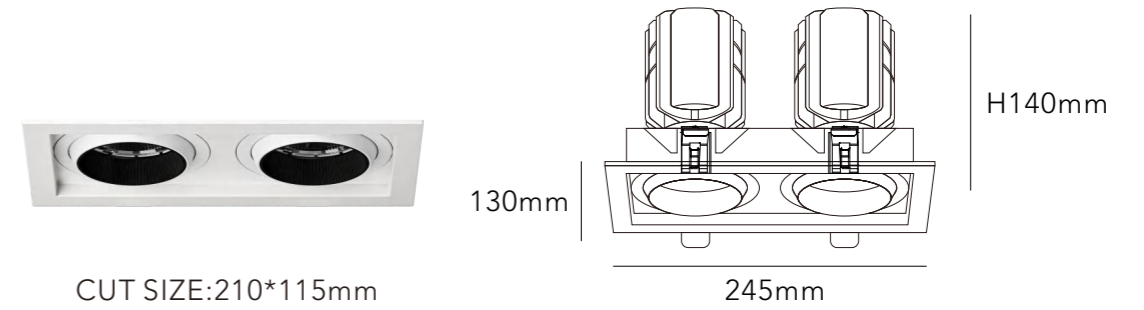

BEAM ANGLE



BODY COLOR



**GTY115F-2**

LIGHT SOURCE	40W*2
IP	IP20
TEMP	3000K/4000K/6000K
VOLTAGE	AC220-240V
ANGLE	15°/24°/36°/55°
RA	>90
LUMENS	3200lm
MATERIAL	ALUMINIUM
DIMMING OPTION	ON/OFF




0-10V

PHASE CUT





CUT SIZE:97mm



H46mm

107mm

BEAM ANGLE



120°

BODY COLOR



WHITE



WHITE

**GQ22Q1**

LIGHT SOURCE 9W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 120°

RA >90

LUMENS 720lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:128mm



H49mm

138mm

BEAM ANGLE



120°

BODY COLOR



WHITE



WHITE

**GQ22Q1**

LIGHT SOURCE 12W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 120°

RA >90

LUMENS 960lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:145mm



H52mm

156mm

BEAM ANGLE



120°

BODY COLOR



WHITE



WHITE

**GQ22Q1**

LIGHT SOURCE 18W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 120°

RA >90

LUMENS 1440lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT








CUT SIZE:185mm

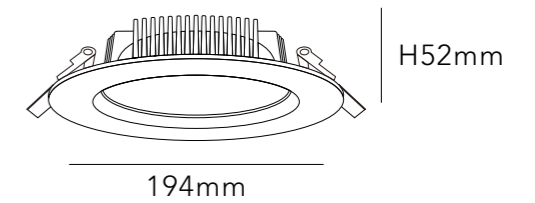

BEAM ANGLE



120°

BODY COLOR



WHITE



WHITE

**GQ22Q1**

LIGHT SOURCE 24W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 120°

RA >90

LUMENS 1920lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:220mm

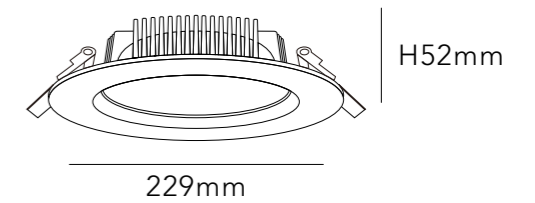

BEAM ANGLE



120°

BODY COLOR



WHITE



WHITE

**GQ22Q1**

LIGHT SOURCE 30W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 120°

RA >90

LUMENS 2400lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V



PHASE CUT





BEAM ANGLE



120°

BODY COLOR




WHITE



BLACK



CUT SIZE:105mm



115mm

H48mm

GQ22

LIGHT SOURCE 9W

IP IP55

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 120°

RA >90

LUMENS 720lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V



PHASE CUT





BEAM ANGLE



120°

BODY COLOR




WHITE



BLACK



CUT SIZE:135mm



H60mm

145mm

GQ22

LIGHT SOURCE 12W

IP IP55

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 120°

RA >90

LUMENS 960lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V



PHASE CUT





BEAM ANGLE



120°

BODY COLOR




WHITE



BLACK



CUT SIZE:150mm



H60mm

159mm

GQ22

LIGHT SOURCE 18W

IP IP55

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 120°

RA >90

LUMENS 1440lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:180mm



H60mm

190mm

BEAM ANGLE



120°

BODY COLOR



WHITE



BLACK

**GQ22**

LIGHT SOURCE 24W

IP IP55

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 120°

RA >90

LUMENS 1920lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V



PHASE CUT





BEAM ANGLE



120°

BODY COLOR



WHITE




BLACK

P337



CUT SIZE:215mm



230mm

H72mm

GQ22

LIGHT SOURCE 30W

IP IP55

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 120°

RA >90

LUMENS 2400lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT



P338



CUT SIZE:110mm



H53mm

119mm

BEAM ANGLE



120°

BODY COLOR



WHITE



BLACK

**SLIM-R-4"**

LIGHT SOURCE 9W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC85-265V

ANGLE 120°

RA >90

LUMENS 720lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT







CUT SIZE:146mm



H53mm

154mm

BEAM ANGLE



120°

BODY COLOR



WHITE



BLACK

**SLIM-R-5"**

LIGHT SOURCE 15W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC85-265V

ANGLE 120°

RA >90

LUMENS 1200lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:166mm



H53mm

174mm

BEAM ANGLE



120°

BODY COLOR



WHITE



BLACK

**SLIM-R-6"**

LIGHT SOURCE 20W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC85-265V

ANGLE 120°

RA >90

LUMENS 1600lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:102\*102mm

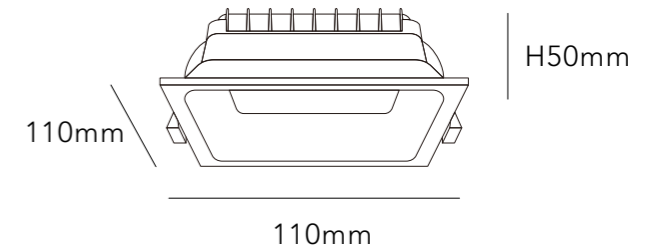

BEAM ANGLE



120°

BODY COLOR



WHITE



BLACK

**SLIM-F-4"**

LIGHT SOURCE 9W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC85-265V

ANGLE 120°

RA >90

LUMENS 720lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:136\*136mm

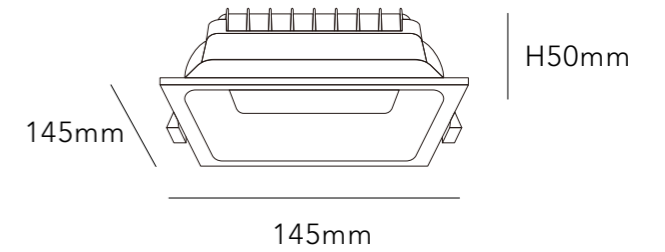

BEAM ANGLE



120°

BODY COLOR



WHITE



BLACK

**SLIM-F-5"**

LIGHT SOURCE 15W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC85-265V

ANGLE 120°

RA >90

LUMENS 1200lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT






CUT SIZE:160\*160mm

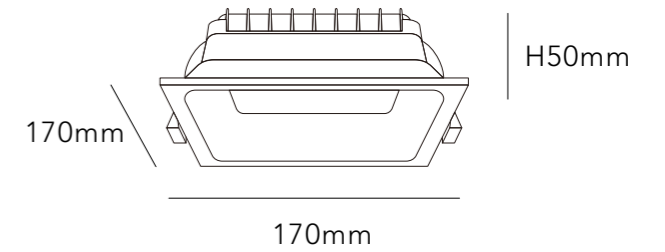

BEAM ANGLE



120°

BODY COLOR



WHITE



BLACK

**SLIM-F-6"**

LIGHT SOURCE 20W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC85-265V

ANGLE 120°

RA >90

LUMENS 1600lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:105mm

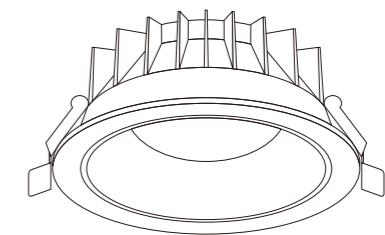

H65mm

115mm

BEAM ANGLE



120°

BODY COLOR



WHITE



BLACK

REFLECTOR COLOR



CHROME



DARK GOLD

**GC93001R**

LIGHT SOURCE 12W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC85-265V

ANGLE 120°

RA >90

LUMENS 960lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT






CUT SIZE:130mm

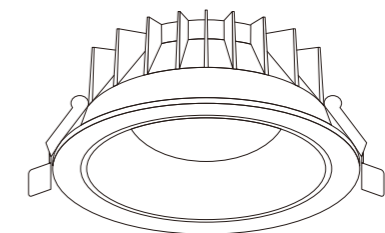

H80mm

140mm

**BEAM ANGLE**



120°

**BODY COLOR**



WHITE



BLACK

**REFLECTOR COLOR**



CHROME



DARK GOLD

**GC94001R**

LIGHT SOURCE 20W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC85-265V

ANGLE 120°

RA >90

LUMENS 1600lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:150mm

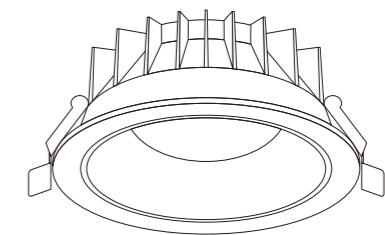

H85mm

160mm

BEAM ANGLE



120°

BODY COLOR



WHITE



BLACK

REFLECTOR COLOR



CHROME



DARK GOLD

**GC95001R**

LIGHT SOURCE 30W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC85-265V

ANGLE 120°

RA >90

LUMENS 2400lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT







CUT SIZE:185mm

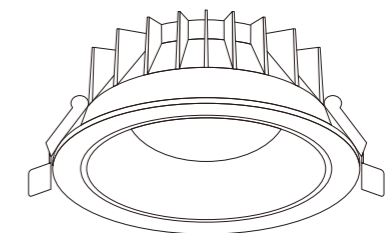

H98mm

198mm

BEAM ANGLE



120°

BODY COLOR



WHITE



BLACK

REFLECTOR COLOR



CHROME



DARK GOLD

**GC96001R**

LIGHT SOURCE 40W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC85-265V

ANGLE 120°

RA >90

LUMENS 3200lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V



PHASE CUT





**BEAM ANGLE**



120°

**BODY COLOR**



WHITE



BLACK

**REFLECTOR COLOR**



CHROME




DARK GOLD

**P359**



CUT SIZE:220mm

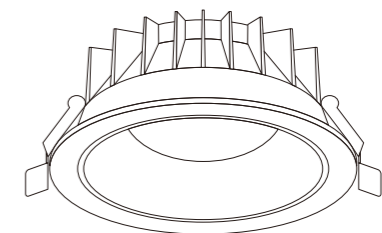

H102mm

230mm

**GC98001R**

LIGHT SOURCE 50W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC85-265V

ANGLE 120°

RA >90

LUMENS 4000lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF




0-10V



PHASE CUT



**P360**

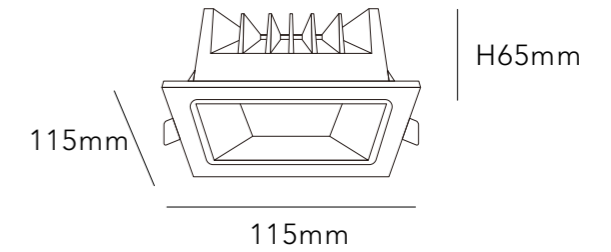

CUT SIZE:105\*105mm

BEAM ANGLE



120°

BODY COLOR



WHITE



BLACK

REFLECTOR COLOR



CHROME



DARK GOLD

**GC93001F**

LIGHT SOURCE 12W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC85-265V

ANGLE 120°

RA >90

LUMENS 960lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF




0-10V



PHASE CUT



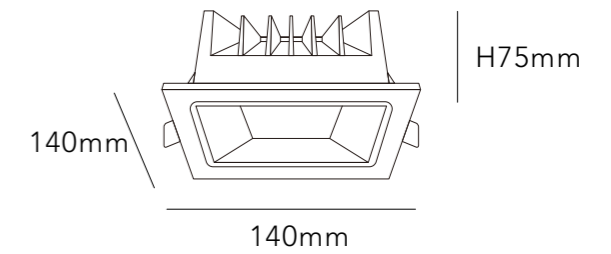

CUT SIZE:130\*130mm

BEAM ANGLE



120°

BODY COLOR



WHITE



BLACK

REFLECTOR COLOR



CHROME



DARK GOLD

**GC94001F**

LIGHT SOURCE 20W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC85-265V

ANGLE 120°

RA >90

LUMENS 1600lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF




0-10V



PHASE CUT



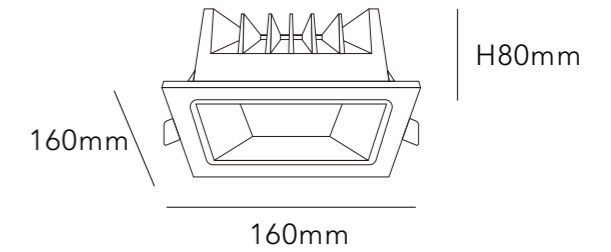

CUT SIZE:150\*150mm

BEAM ANGLE



120°

BODY COLOR



WHITE



BLACK

REFLECTOR COLOR



CHROME



DARK GOLD

GC95001F

LIGHT SOURCE 30W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC85-265V

ANGLE 120°

RA >90

LUMENS 2400lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF




0-10V



PHASE CUT



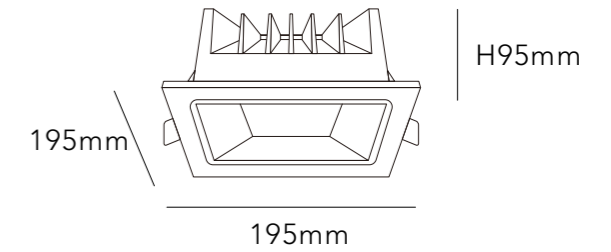

CUT SIZE:180\*180mm

BEAM ANGLE



120°

BODY COLOR



WHITE



BLACK

REFLECTOR COLOR



CHROME



DARK GOLD

**GC96001F**

LIGHT SOURCE 40W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC85-265V

ANGLE 120°

RA >90

LUMENS 3200lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:55mm



H30mm

70mm

BEAM ANGLE



120°

BODY COLOR



WHITE



BLACK

**GC2104E-2**

LIGHT SOURCE 3W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 120°

RA >90

LUMENS 240lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:75mm



100mm

H30mm

BEAM ANGLE



120°

BODY COLOR



WHITE



BLACK

## GC2104E-2.5

LIGHT SOURCE 5W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 120°

RA >90

LUMENS 400lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT







CUT SIZE:90mm

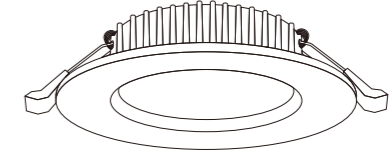

110mm

H30mm

**BEAM ANGLE**



120°

**BODY COLOR**



WHITE



BLACK

**GC2104E-3**

LIGHT SOURCE 7W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 120°

RA >90

LUMENS 560lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:100mm

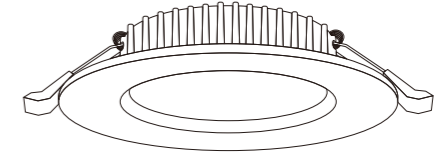

120mm

H30mm

## GC2104E-3.5

LIGHT SOURCE 9W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 120°

RA >90

LUMENS 720lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V



PHASE CUT



BEAM ANGLE



120°

BODY COLOR




WHITE



BLACK



CUT SIZE:120mm

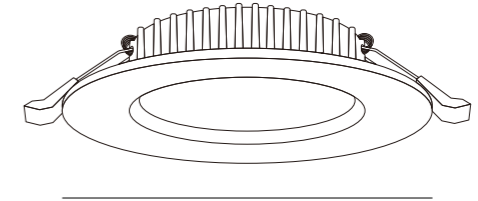

145mm

H30mm

BEAM ANGLE



120°

BODY COLOR



WHITE



BLACK

**GC2104E-4**

LIGHT SOURCE 12W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 120°

RA >90

LUMENS 960lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT






CUT SIZE:145mm

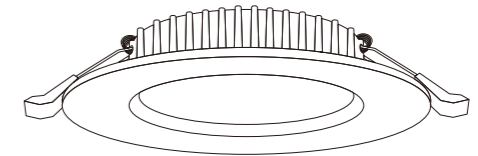

H30mm

170mm

BEAM ANGLE



120°

BODY COLOR



WHITE



BLACK

**GC2104E-5**

LIGHT SOURCE 15W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 120°

RA >90

LUMENS 1200lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:160mm

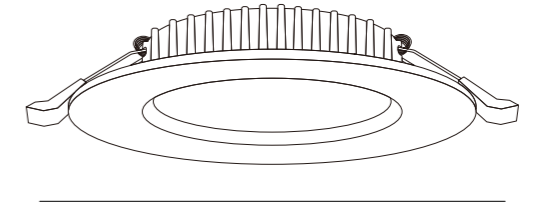

180mm

H30mm

BEAM ANGLE



120°

BODY COLOR



WHITE



BLACK

**GC2104E-6**

LIGHT SOURCE 18W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 120°

RA >90

LUMENS 1440lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT






CUT SIZE:200mm

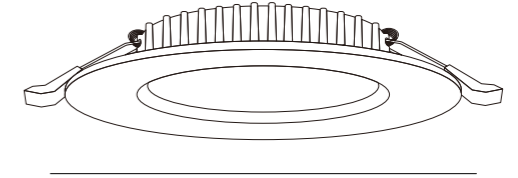

H30mm

230mm

BEAM ANGLE



120°

BODY COLOR



WHITE



BLACK

## GC2104E-8

LIGHT SOURCE 24W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 120°

RA >90

LUMENS 1920lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:80\*80mm

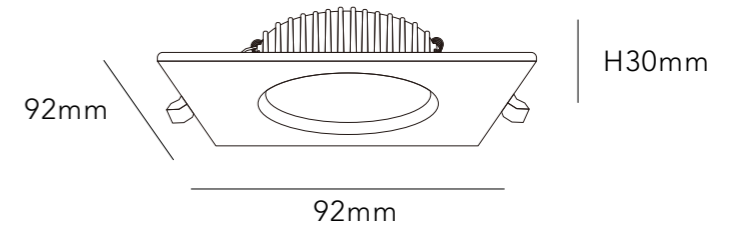

BEAM ANGLE



120°

BODY COLOR



WHITE



BLACK

## GC2105E-2.5

LIGHT SOURCE 5W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 120°

RA >90

LUMENS 400lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF




0-10V



PHASE CUT



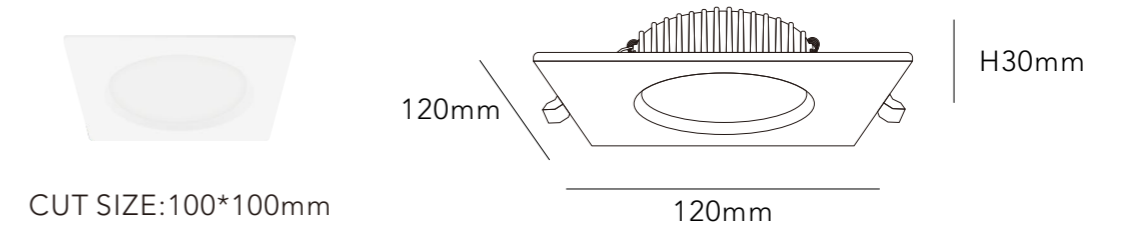

BEAM ANGLE



120°

BODY COLOR



WHITE



BLACK

### GC2105E-3.5

LIGHT SOURCE 9W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 120°

RA >90

LUMENS 720lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF




0-10V



PHASE CUT





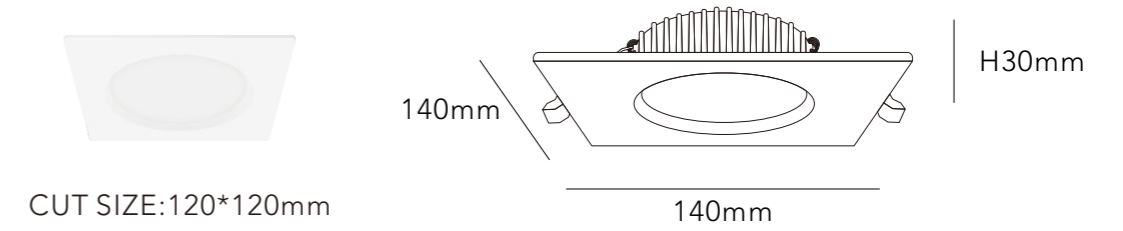

BEAM ANGLE



120°

BODY COLOR



WHITE



BLACK

**GC2105E-4**

LIGHT SOURCE 12W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 120°

RA >90

LUMENS 960lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF




0-10V



PHASE CUT



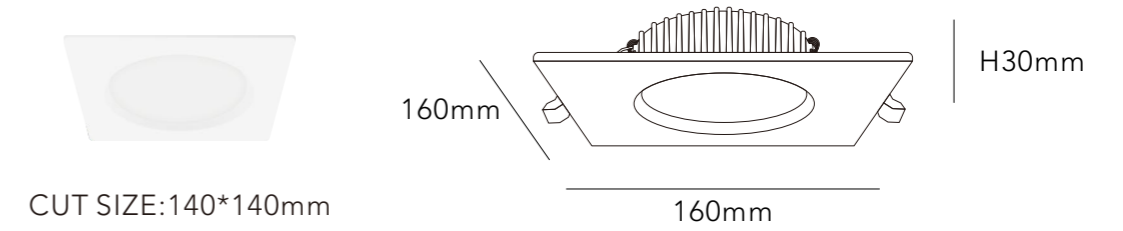

BEAM ANGLE



BODY COLOR



WHITE



BLACK

**GC2105E-5**

LIGHT SOURCE 15W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 120°

RA >90

LUMENS 1200lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF




0-10V



PHASE CUT



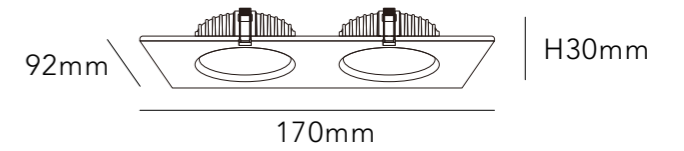

CUT SIZE:L75\*W160mm

BEAM ANGLE



120°

BODY COLOR



WHITE



BLACK

## GC2105E-D2.5

LIGHT SOURCE 5W\*2

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 120°

RA >90

LUMENS 800lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF




0-10V



PHASE CUT



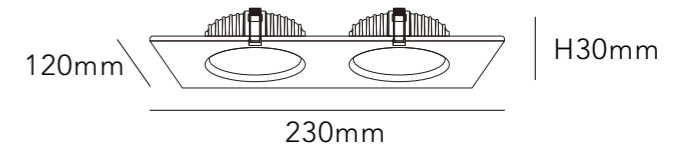

CUT SIZE:L95\*W200mm

BEAM ANGLE



120°

BODY COLOR



WHITE



BLACK

### GC2105E-D3.5

LIGHT SOURCE 9W\*2

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 120°

RA >90

LUMENS 1440lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF




0-10V



PHASE CUT



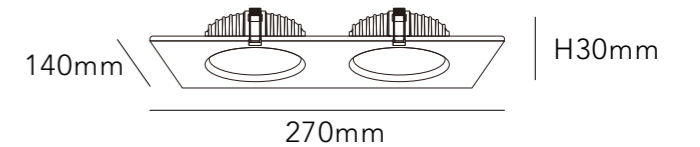

CUT SIZE:L120\*W250mm

BEAM ANGLE



120°

BODY COLOR



WHITE



BLACK

## GC2105E-D4

LIGHT SOURCE 12W\*2

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 120°

RA >90

LUMENS 1920lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF




0-10V



PHASE CUT



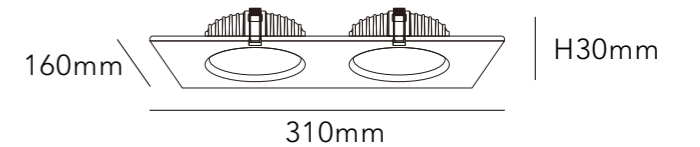

CUT SIZE:L140\*W290mm

BEAM ANGLE



120°

BODY COLOR



WHITE



BLACK

## GC2105E-D5

LIGHT SOURCE 15W\*2

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 120°

RA >90

LUMENS 2400lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:37\*37mm

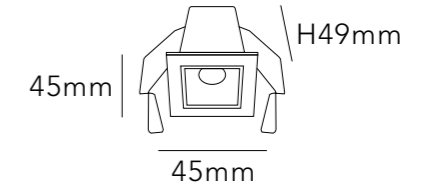

BEAM ANGLE



BODY COLOR



REFLECTOR COLOR



BLACK

MINI01

LIGHT SOURCE 2W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC85-265V

ANGLE 15°/30°/45°

RA >90

LUMENS 160lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:68\*37mm

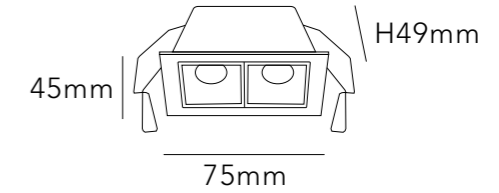

BEAM ANGLE



BODY COLOR



REFLECTOR COLOR



BLACK

## MINI02

LIGHT SOURCE 4W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC85-265V

ANGLE 15°/30°/45°

RA >90

LUMENS 320lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT







CUT SIZE:140\*37mm

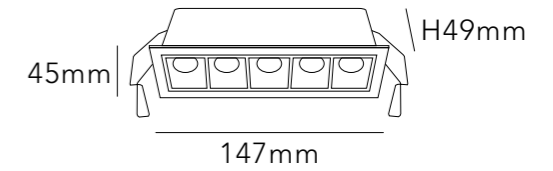

**BEAM ANGLE**



**BODY COLOR**



**REFLECTOR COLOR**



**MINI05**

LIGHT SOURCE 10W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC85-265V

ANGLE 15°/30°/45°

RA >90

LUMENS 800lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:273\*37mm

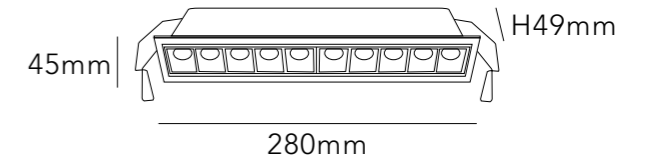

BEAM ANGLE



BODY COLOR



REFLECTOR COLOR



MINI10

LIGHT SOURCE 20W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC85-265V

ANGLE 15°/30°/45°

RA >90

LUMENS 1600lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V



PHASE CUT





BEAM ANGLE



BODY COLOR



REFLECTOR COLOR




P409



CUT SIZE:405\*37mm

45mm



H49mm

412.7mm

MINI15

LIGHT SOURCE 30W

IP IP20

TEMP 3000K/4000K/6000K

VOLTAGE AC85-265V

ANGLE 15°/30°/45°

RA >90

LUMENS 2400lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT



P410



CUT SIZE:55mm

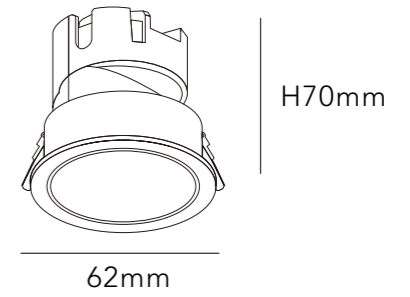

BEAM ANGLE



BODY COLOR



REFLECTOR COLOR



GFS1

LIGHT SOURCE 7W

IP IP65

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/38°

RA >90

LUMENS 560lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:55mm

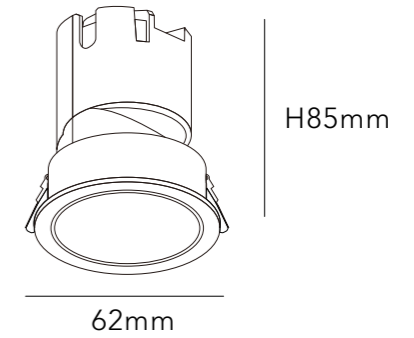

BEAM ANGLE



BODY COLOR



REFLECTOR COLOR



GFS2

LIGHT SOURCE 10W

IP IP65

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/38°

RA >90

LUMENS 800lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:75mm

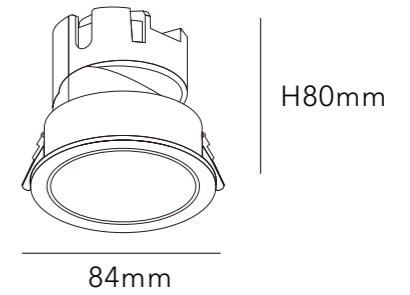

BEAM ANGLE



BODY COLOR



REFLECTOR COLOR



GFS3

LIGHT SOURCE 12W

IP IP65

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/38°

RA >90

LUMENS 960lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V



PHASE CUT





BEAM ANGLE



BODY COLOR




REFLECTOR COLOR



P417



CUT SIZE:75mm

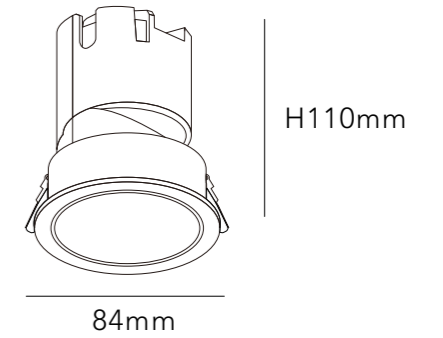

GFS4

LIGHT SOURCE 20W

IP IP65

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/38°

RA >90

LUMENS 1600lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V



PHASE CUT



P418



BEAM ANGLE



BODY COLOR




REFLECTOR COLOR



P419



CUT SIZE:96mm



H110mm

105mm

GFS5

LIGHT SOURCE 25W

IP IP65

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/38°

RA >90

LUMENS 2000lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V



PHASE CUT



P420






BEAM ANGLE



BODY COLOR




REFLECTOR COLOR



P421



CUT SIZE:96mm



H130mm

105mm

GFS6

LIGHT SOURCE 30W

IP IP65

TEMP 3000K/4000K/6000K

VOLTAGE AC220-240V

ANGLE 15°/24°/38°

RA >90

LUMENS 2400lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT



P422



CUT SIZE:75mm



H72mm

86mm

BEAM ANGLE



24°

45°

60°

BODY COLOR



WHITE



BLACK


REFLECTOR COLOR



WHITE



BLACK



CHROME

GCF1H

LIGHT SOURCE 12W

IP IP65

TEMP 3000K/4000K/6000K

VOLTAGE AC85-265V

ANGLE 24°/45°/60°

RA >90

LUMENS 960lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:95mm



H76mm

112mm

BEAM ANGLE



24°

45°

60°

BODY COLOR



WHITE



BLACK


REFLECTOR COLOR



WHITE



BLACK



CHROME

P425

GCF2H

LIGHT SOURCE 15W

IP IP65

TEMP 3000K/4000K/6000K

VOLTAGE AC85-265V

ANGLE 24°/45°/60°

RA >90

LUMENS 1200lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT



P426



CUT SIZE:125mm



H95mm

135mm

BEAM ANGLE



BODY COLOR



REFLECTOR COLOR

P427

GCF3H

LIGHT SOURCE 20W

IP IP65

TEMP 3000K/4000K/6000K

VOLTAGE AC85-265V

ANGLE 24°/45°/60°

RA >90

LUMENS 1600lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V


PHASE CUT



P428



CUT SIZE:170mm



H110mm

180mm

BEAM ANGLE



24°

45°

60°

BODY COLOR



WHITE



BLACK

REFLECTOR COLOR



WHITE



BLACK



CHROME

P429

GCF4H

LIGHT SOURCE 30W

IP IP65

TEMP 3000K/4000K/6000K

VOLTAGE AC85-265V

ANGLE 24°/45°/60°

RA >90

LUMENS 2400lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT



P430



CUT SIZE:190mm



210mm

H120mm

BEAM ANGLE



24°

45°

60°

BODY COLOR



WHITE



BLACK


REFLECTOR COLOR



WHITE



BLACK



CHROME

GCF5H

LIGHT SOURCE 50W

IP IP65

TEMP 3000K/4000K/6000K

VOLTAGE AC85-265V

ANGLE 24°/45°/60°

RA >90

LUMENS 4000lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V




PHASE CUT





CUT SIZE:220mm



H128mm

240mm

BEAM ANGLE



24°

45°

60°

BODY COLOR



WHITE



BLACK


REFLECTOR COLOR



WHITE



BLACK



CHROME

GCF6H

LIGHT SOURCE 80W

IP IP65

TEMP 3000K/4000K/6000K

VOLTAGE AC85-265V

ANGLE 24°/45°/60°

RA >90

LUMENS 6400lm

MATERIAL ALUMINIUM

DIMMING OPTION ON/OFF



0-10V



PHASE CUT





[WWW.IANLED.COM](http://WWW.IANLED.COM)

Sales Center:

NO.16,1st Floor Adminstrative service center building,  
NO.163Xingle Road,Lecong Town,Shunde area Foshan City G.D.

Producing Address:

Block C, No.28 XiangAnNan RD, Changxing Industrial Area,  
Junan Town, Shunde Area, Foshan City, G.D.